

(2.54 mm) .100"

SSM SERIES

# TIGER CLAW™ SURFACE MOUNT SOCKET

**Mates with:**

TSW, MTSW, TST, TSS, ZST, ZSS, DW, EW, ZW, TSM, HMTSW, HTSW, TSSH, BST, HTSS, TLW, MTLW

**SPECIFICATIONS**

For complete specifications and recommended PCB layouts see [www.samtec.com?SSM](http://www.samtec.com?SSM)

**Insulator Material:** Black Liquid Crystal Polymer  
**Contact Material:** Phosphor Bronze  
**Plating:** Au or Sn over 50 µ" (1.27 µm) Ni

**Current Rating (SSM/TSW):** 5.2 A per pin (2 pins powered)  
**Voltage Rating:** 405 VAC / 572 VDC

**Operating Temp Range:** -55 °C to +125 °C with Gold  
 -55 °C to +105 °C with Tin

**Insertion Depth:** SV/DV is (4.34 mm) .171" to (7.24 mm) .285" or pass-through from top; (5.56 mm) .219" plus board thickness minimum from bottom; SH/DH is (4.34 mm) .171" to (6.35 mm) .250"

**Normal Force:** 125 grams (1.21 N) average  
**RoHS Compliant:** Yes

SSM	1	NO. PINS PER ROW	PLATING OPTION	ROW OPTION	OTHER OPTION
02 thru 36 (-SV, -SH, -DH)	TIGER CLAW CONTACT	02 thru 40 (-DV)	-F = Gold flash on contact, Matte Tin on tail	-L = 10 µ" (0.25 µm) Gold on contact, Matte Tin on tail	-BE = Bottom Entry (-DV & -SV only)
			-S = 30 µ" (0.76 µm) Gold on contact, Matte Tin on tail		-K = (6.50 mm) .256" DIA Polyimide film Pick & Place Pad (2 positions min.) -DV & -SV only
					-P = Plastic Pick & Place Pad (-DV & -SV only) (6 positions min. Contact Samtec for availability on smaller positions)
					-"XXX" = Polarized Position (-BE not available)
					-TR = Tape & Reel Packaging (29 positions max.)

**HIGH-SPEED CHANNEL PERFORMANCE**

Rating based on Samtec reference channel. For full SI performance data visit [Samtec.com](http://Samtec.com) or contact [SIG@samtec.com](mailto:SIG@samtec.com)

8 Gbps

**APPLICATIONS**

TSM  
SSM  
TSSH

HORIZONTAL

**PROCESSING**

**Lead-Free Solderable:** Yes

**-DH Coplanarity:** Less than 28 positions (0.15 mm) .006" max\*

More than 27 positions (0.20 mm) .008" max\*

**-SH, -SV, -DV Coplanarity:** (0.15 mm) .006" max\*  
 \*(.004" stencil solution may be available; contact [IPG@samtec.com](mailto:IPG@samtec.com))

**RECOGNITIONS**

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)




**ALSO AVAILABLE**  
(MOQ Required)


- Alignment pin

**Note:** Some lengths, styles and options are non-standard, non-returnable.


**-SV**  
= Single Row Vertical Pin

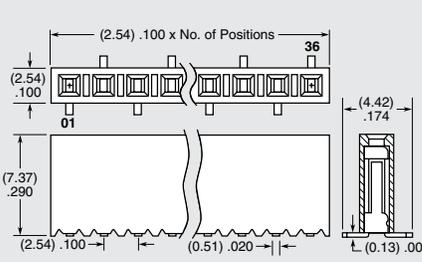


**-DV**  
= Double Row Vertical Pin

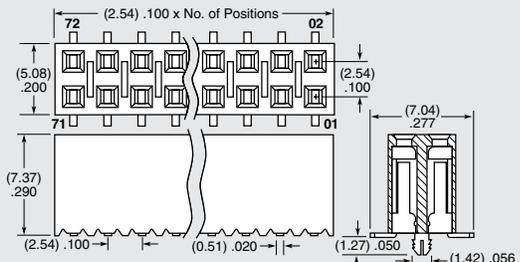

**-SH**  
= Single Row Horizontal Pin

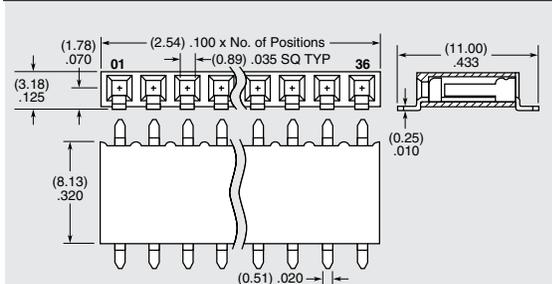

**-DH**  
= Double Row Horizontal Pin

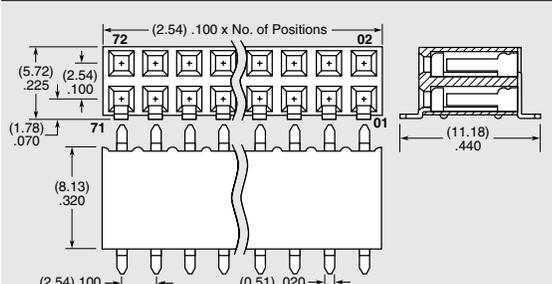

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.