

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:


SHELL: THERMOPLASTIC, UL94 V-0.


- 2. SPECIFICATIONS:
 - 2.1, OPERATING TEMPERATURE: -40~125°C.
 - 2.2, MATING CYCLES DURABILITY: 100 CYCLES MIN (MATING WITH PL000733)
 - 2.3, RoHS COMPLIANT.
- 3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

| REVISIONS | | | | | | | | | | | |
|-----------|-----|----------------|-------------|-------|-------|--|--|--|--|--|--|
| REV | ECO | DESCRIPTION | DATE | BY | APPR | | | | | | |
| A1 | | FIRST RELEASED | APR-10-2020 | BLINK | TOMMY | | | | | | |

TELECOM 2.4mm CONNECTOR, PLUG HOUSING

PL000734

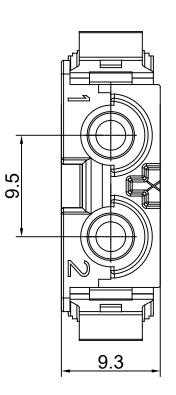

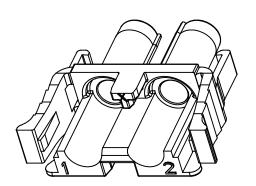

| QUANTITY | PART NUMBER | | | DESCRIPTION | | | | | ITEM | |
|---|-------------------------------|--|-------|-------------|---|---------|--------|-------|-----------|---|
| | | N | /AT | ERI | ٩LS | S LI | ST | | | - |
| UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: | | DDAWN | | DATE | Amphanol | | | | | |
| | | | | APR-10-2020 | Amphenol | | | | | |
| 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 | Fractions ±1/64 Angles ±1° | CHECKED: | ORION | APR-13-2020 | | | | e.com | | |
| 3) Note reference = X | | ENGINEER: | | | 44724 Morley Drive Clinton Township, MI 4803 | | | | | |
| MATERIAL SPECIFICA | MATERIAL SPECIFICATIONS: | | TOMMY | APR-15-2020 | | | | | | |
| PROCESS SPECIFICATIONS: NEXT ASS'Y: | | CUSTOMER: | | | 2.4MM FEMALE PLUG HOUSING FOR USE WITH PL000735, PRM SERIES™ | | | | | |
| | | THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, | | | | | | | | |
| | | SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL | | B | ТҮРЕ | DWG NO: | PL0007 | 34 | A1 | |
| | | MANUFACTURING VARIATIONS. | | | SCALE: N | ONE | | | SHEET 1 O | 1 |