



OVERALL DIMENSIONS

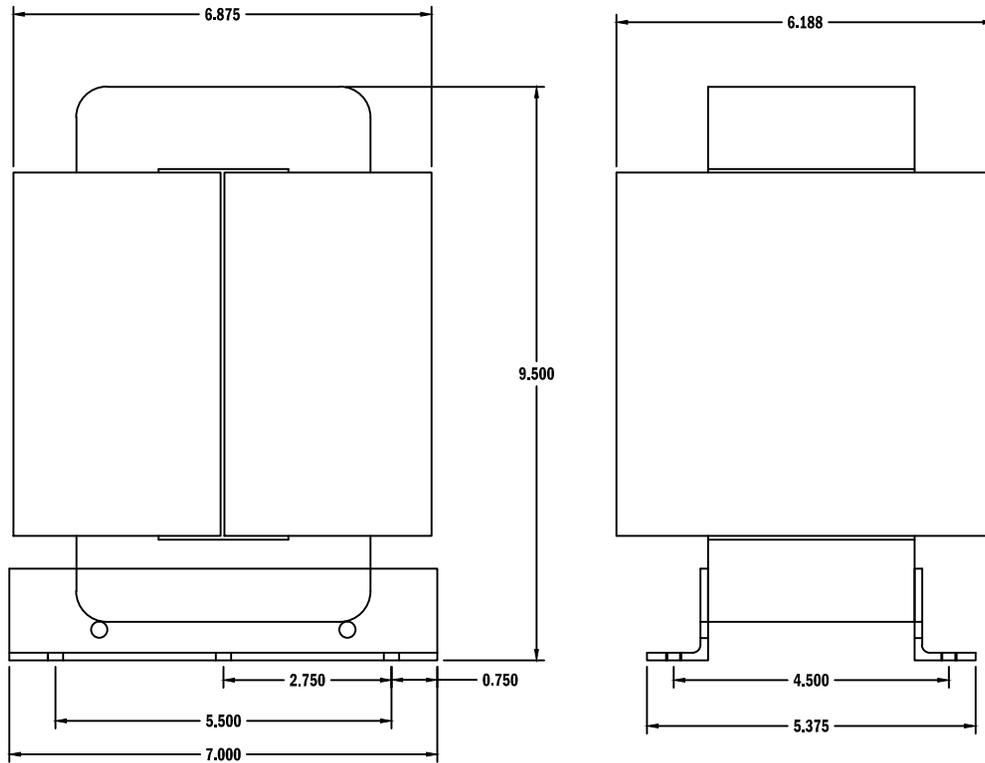

PRIMARY
 BLACK LEADS
 120/240V 50/60HZ



SECONDARY
 RED
 2400V/3400V @ 0.9A
 GREEN
 5.0V @ 20.0A
 ORANGE
 50V @ 1.0A
 YELLOW
 44VCT @ 0.5A

SCHEMATIC DIAGRAM

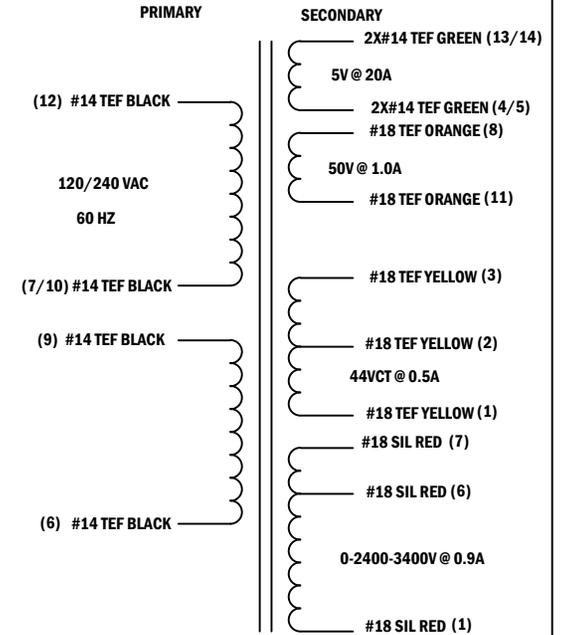

PIN NUMBERS FOR EACH CONNECTOR ARE INDICATED IN BRACKETS
 THE HIGH VOLTAGE OUTPUTS ARE LOCATED IN THE 9 PIN CONNECTOR
 ALL OTHER INPUTS AND OUTPUTS ARE IN THE 15 PIN CONNECTOR

MOUNTING FOOT DETAIL

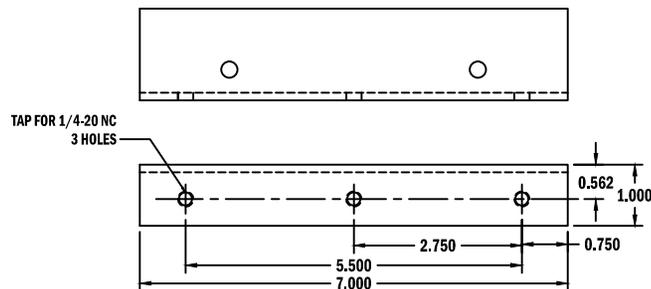

PROPERTY AND COPYRIGHT NOTICE

THIS DRAWING AND THE INFORMATION IT CONVEYS ARE THE PROPERTY OF HAMMOND MANUFACTURING. IT MAY NOT BE REPRODUCED, TRANSMITTED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF HAMMOND MANUFACTURING.

REV	NOTES	BY	DATE	REV	NOTES	BY	DATE

HAMMOND MANUFACTURING ELECTRONIC DIVISION
 52 RANKIN PLACE,
 WATERLOO, ONTARIO, N2J 3Z5
 PHONE: 519.886.6181 FAX: 519.886.9540

ALPHA 77S-4

DRAWN C. BACIK	DATE 11/06/13	NUMBER PWDP13009
APPROVED	DATE	