

ZMX40M

DUAL MAGNETIC FIELD SENSOR

DESCRIPTION



This device is a special tangential field difference sensor with two AMR (Anisotropic Magneto-Resistive) bridges for field movement measurements or field comparative measurements.

The ZMX40M contains two extremely sensitive magnetic sensor chips, mounted parallel to each other in an SMD package, employing the magneto-resistive effect of thin film permalloy. It allows the measurement of magnetic fields or the detection of magnetic parts. The sensors each consist of a chip covered with thin film permalloy stripes which form a Wheatstone bridge, whose output voltage is proportional to the magnetic field component H_y . A field H_x , which is perpendicular to H_y , is necessary to suppress the hysteresis and to bias the sensors into the linear region. This field H_x is provided by an internal permanent magnet.

The chips are mounted in the package 3mm apart. If a magnet travels horizontally above the sensor, each chip will give an output which will peak as the magnet passes above it and the two peaks will be spatially separated by 3mm.

FEATURES

- Output voltage proportional to magnetic field H_y across each chip
- Both chips are in the same orientation and chip centres are 3mm apart in Y direction
- Magnetic fields vertical to the chip level H_z are not effective
- Disturbing fields H_x up to 30 kA/m are allowed
- Extremely small chip distance from the top side of package for accurate measurement
- Internal magnet each chip for creation of auxiliary field H_x

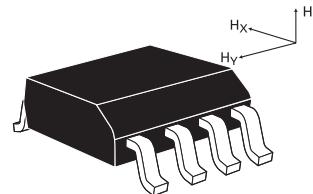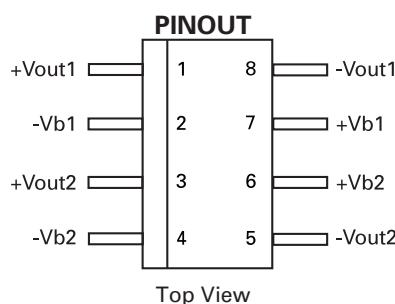

When the two peaks are the same amplitude, the magnet must be mid-way between the two chips. Therefore this double sensor can be used to measure position of, for example, a wheel tooth very accurately for automotive and machine-tool applications. With calibration to allow for the tolerances on the bridge outputs being slightly different, the ZMX40M has been used in machine tool applications to resolve distances down to 30µm. By comparing the two outputs and adding some hysteresis, a large-geometry magnetic tape reader (for example for a magnetic tape ruler) can be made. By combining both bridge outputs a current sensor can be also made by adding an external current loop over or under the ZMX40M. This loop is outside the package and therefore provides excellent galvanic isolation.

APPLICATIONS

- Linear position measurement for process control, door interlocks, proximity detectors and precision machine tools
- H-field movement measurement for a magnetic tape recognition
- High voltage isolated current measurement up to many amps range by using a suitable current loop over or under the IC
- Detection of rotating magnets in the presence of a disturbing field by comparisons of maximum values of individual sensors

DEVICE MARKING

- ZMX40M

CONNECTION DIAGRAM

AMR chip 1: supply voltage between +Vb1 and -Vb1
output voltage of bridge between +Vout1 and -Vout1

AMR chip 2: supply voltage between +Vb2 and -Vb2
output voltage of bridge between +Vout2 and -Vout2

ZMX40M

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | LIMIT | UNIT |
|---|------------------|-------------|------|
| Supply voltage for each sensor chip (1,2) | V _B | 12 | V |
| Total power dissipation | P _{TOT} | 240 | mW |
| Operating temperature range | T _{amb} | -25 to +125 | °C |
| Storage temperature range | T _{stg} | -25 to +125 | °C |

ELECTRICAL CHARACTERISTICS (at T_{amb}=25°C and H_X=3 kA/m unless otherwise stated)

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNIT | TEST CONDITIONS |
|--|----------------------------------|-------|------|-------|---------------|----------------------------------|
| Bridge resistance | R _{br} | 1.4 | - | 2.2 | kΩ | |
| Output voltage range | V _O /V _B | 12 | - | 24 | mV/V | |
| Open circuit sensitivity | S | 3.0 | - | 5.0 | (mV/V)/(kA/m) | V _B =const. |
| Hysteresis of output voltage | V _{OH} /V _B | - | - | 50 | μV/V | |
| Offset voltage | V _{off} /V _B | -1.5 | - | +1.5 | mV/V | |
| Operating frequency | f _{max} | 0 | - | 1 | MHz | |
| Temp. coeff. of offset voltage | TCV _{off} | -3 | - | +3 | (μV/V)/K | T _{amb} = -25 to +125°C |
| Temp. coeff. of bridge resistance | TCR _{br} | +0.25 | +0.3 | +0.35 | %/K | T _{amb} = -25 to +125°C |
| Temp. coeff. of open circuit sensitivity V _B =5V | TCS _V | -0.25 | -0.3 | -0.35 | %/K | T _{amb} = -25 to +125°C |
| Temp. coeff. of open circuit sensitivity I _B =3mA | TCS _I | - | -0.1 | - | %/K | T _{amb} = -25 to +125°C |

ORDERING INFORMATION

| DEVICE | REEL SIZE | TAPE WIDTH | QUANTITY PER REEL |
|------------|-----------|------------|-------------------|
| ZMX40MT8TA | 7" | 12mm | 1000 units |
| ZMX40MT8TC | 13" | 12mm | 4000 units |




ISSUE 1 - MARCH 2004

ZMX40M


TYPICAL APPLICATIONS

Magnetic tape scanning (field movement measurement for magnetic tape ruler):

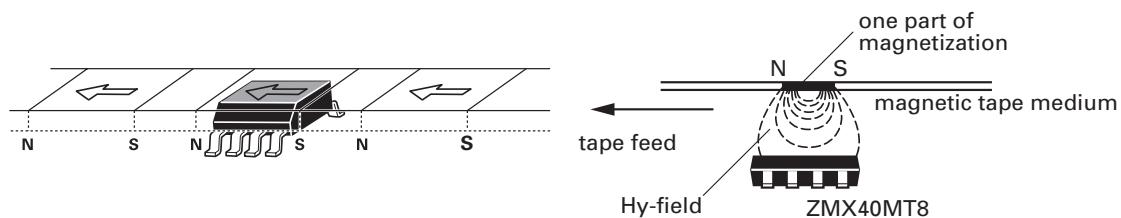


The changing voltage peaks in both AMR bridges are used for the tape movement measurement.

ZMX40M plus two instrumentation amplifiers for magnetic tape ruler

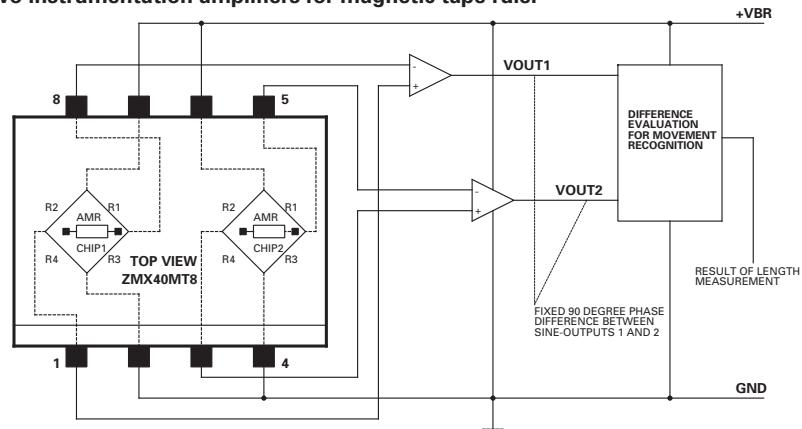


Current sensor (by combining both bridge outputs and a high isolation voltage)

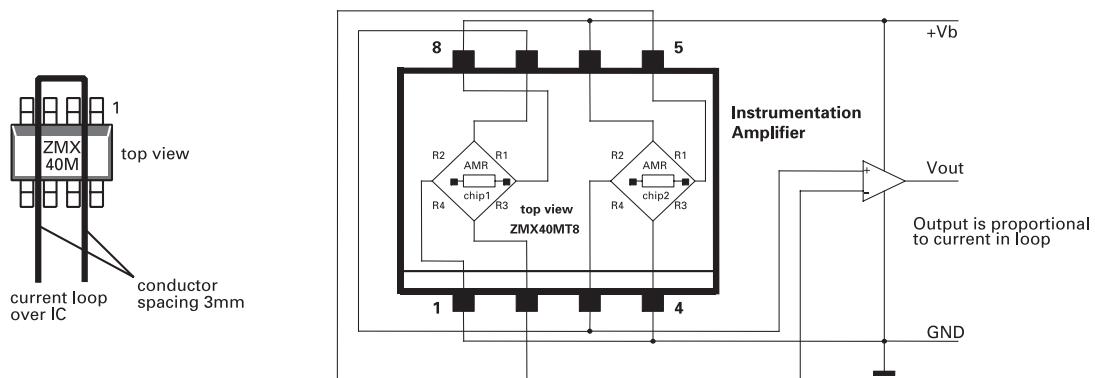


This double chip solution with the current loop conductor guarantees good rejection of external fields and a high isolation voltage.

ZMX40M

Sensor output characteristic
ZMX40M
 $V_o = f(H_y)$ typ.

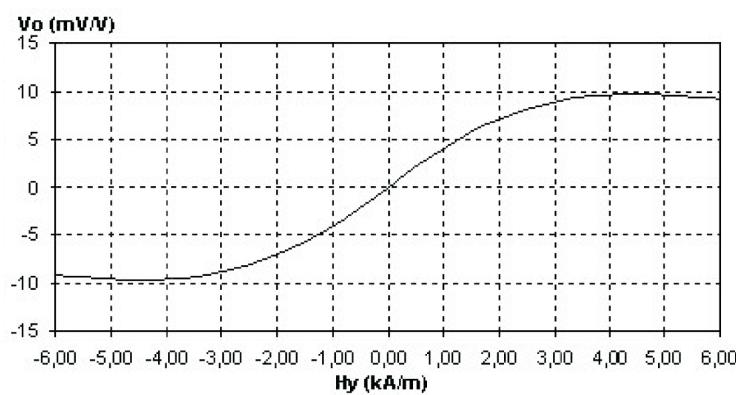


Supply voltage (maximum) derating curve
ZMX40M
 $V_{b\max} = f(T_{amb})$

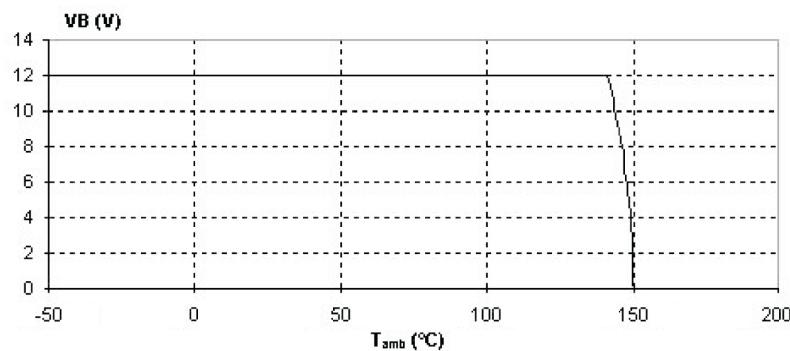

ZMX40M

PACKAGE OUTLINE

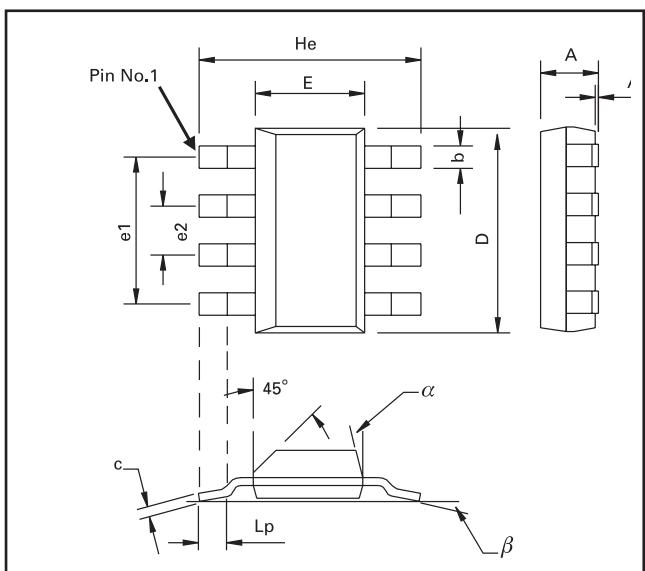

PACKAGE DIMENSIONS

| DIM | Millimeters | | | Inches | | | DIM | Millimeters | | | Inches | | |
|-----|-------------|------|------|--------|-------|--------|-----|-------------|-----|------|--------|-------|--------|
| | Min | Max | Typ. | Min | Max | Typ. | | Min | Max | Typ. | Min | Max | Typ. |
| A | - | 1.7 | - | - | 0.067 | - | e1 | - | - | 4.59 | - | - | 0.1807 |
| A1 | 0.02 | 0.1 | - | 0.008 | 0.004 | - | e2 | - | - | 1.53 | - | - | 0.0602 |
| b | - | - | 0.7 | - | - | 0.0275 | He | 6.7 | 7.3 | - | 0.264 | 0.287 | - |
| c | 0.24 | 0.32 | - | 0.009 | 0.013 | - | Lp | 0.9 | - | - | 0.035 | - | - |
| D | 6.3 | 6.7 | - | 0.248 | 0.264 | - | α | - | 15° | - | - | 15° | - |

© Zetex plc 2004

| Europe | Americas | Asia Pacific | Corporate Headquarters |
|---|---|---|---|
| Zetex GmbH Streifeldstraße 19 D-81673 München Germany | Zetex Inc 700 Veterans Memorial Hwy Hauppauge, NY 11788 USA | Zetex (Asia) Ltd 3701-04 Metropiazza Tower 1 Hing Fong Road, Kwai Fong Hong Kong | Zetex plc Fields New Road, Chadderton Oldham, OL9 8NP United Kingdom |
| Telefon: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49 europe.sales@zetex.com | Telephone: (1) 631 360 2222 Fax: (1) 631 360 8222 usa.sales@zetex.com | Telephone: (852) 26100 611 Fax: (852) 24250 494 asia.sales@zetex.com | Telephone (44) 161 622 4444 Fax: (44) 161 622 4446 hq@zetex.com |

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com

ISSUE 1 - MARCH 2004