

REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR		
Α	-	RELEASE	30SEP13	DRP	-		

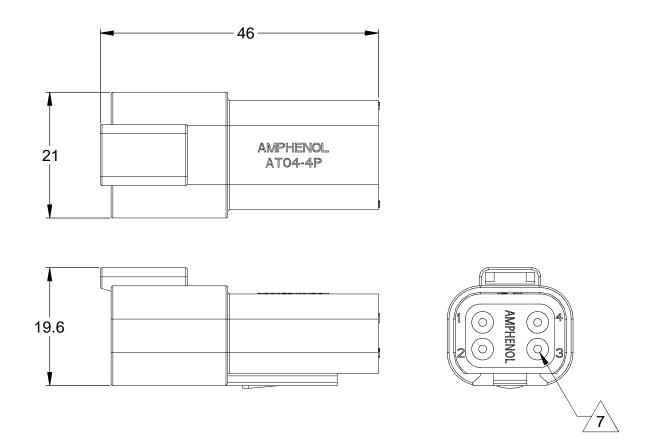

REFERENCE DIMENSIONS - ASSEMBLED RECEPTACLE

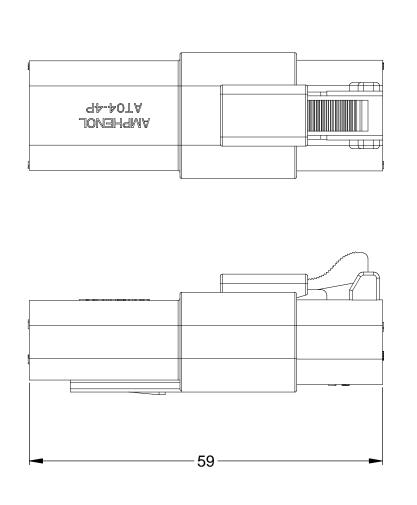

ASSEMBLED PLUG AND RECEPTACLE


NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
- HOUSING: THERMOPLASTIC; COLOR: GREY WEDGELOCK: THERMOPLASTIC; COLOR: GREEN SEALS: SILICONE RUBBER CONTACTS: COPPER ALLOY; NICKEL PLATED
- 2. SPECIFICATIONS:
 - 2.1 CURRENT RATING: 13 AMPS
 - 2.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 2.5 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP @ 13 AMP TEST CURRENT.
 - 2.6 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 - 2.7 CONNECTOR MATING CYCLE DURABILITY: 100 CYCLES


- 3. AVAILABLE HAND CRIMPER: CA-5D12
- 4. ALL COMPONENTS ARE ROHS COMPLIANT.
- 5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 6 WIRE RANGE OF CONTACTS INCLUDED ÎN KIT: 16 - 20 AWG

7 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL.	MAX. INSUL.	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	2.24 mm (.088 in)	3.68 mm (.145 in)	

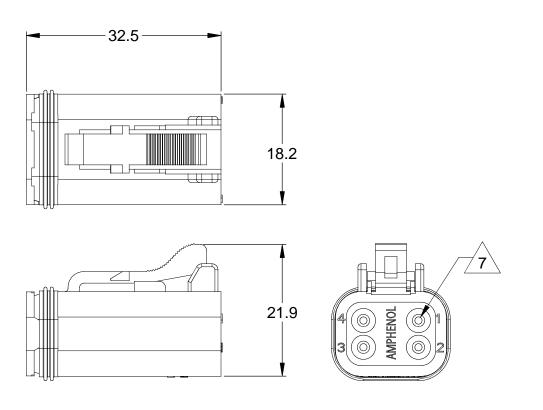

REFERENCE DIMENSIONS - ASSEMBLED PLUG

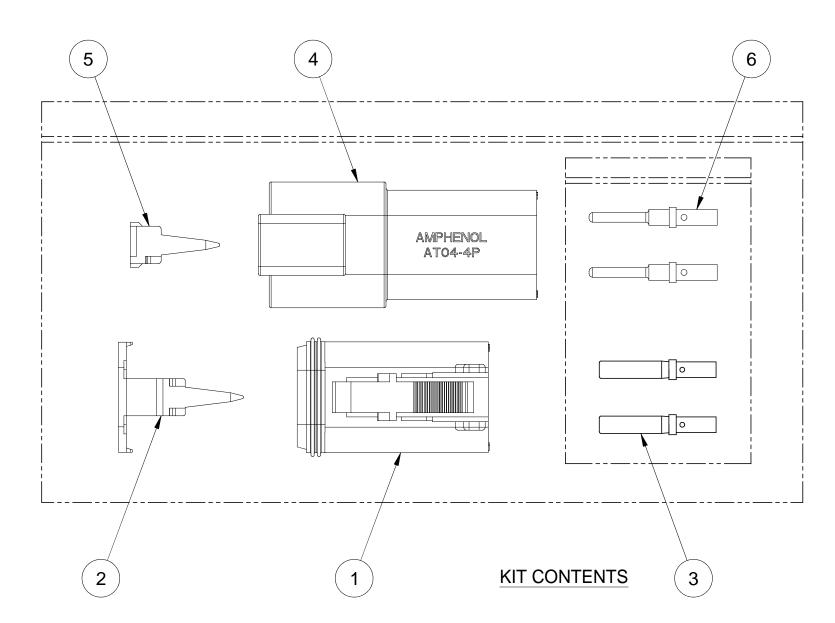

^								
3	4	AT60-202-16141			CONTACT, PIN, SOLID, SIZE 16, 16-20 AWG			
	1	AW4P			P-WEDGELOCK, 4 POSITION, AT SERIES			5
^	1	AT04-4P			RECEPTACLE, 4 PIN, AT SERIES			4
3	4	AT62-201-16141			CONTACT, SOCKET, SOLID, SIZE 16, 16-20 AWG			3
	1	1 AW4S			S-WEDGELOCK, 4 POSITION, AT SERIES			2
	1	1 AT06-4S			PLUG, 4 SOCKET, AT SERIES			1
	QUANTITY	TITY PART NUMBER		2	DESCRIPTION			ITEM
	MATERIALS LIST						ST	
	1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 3) Note reference =		DRAWN:	D.PARKS	S DATE 30SEP13	А	mphenol	
			ENGINEER:			Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036		
	PROCESS SPECIFICA						117.010,7.110 112002200110	

SCALE: NONE

SHEET 1 OF 1