


## Comus Group of Companies

## PRODUCT DATA SHEET

Supplied by

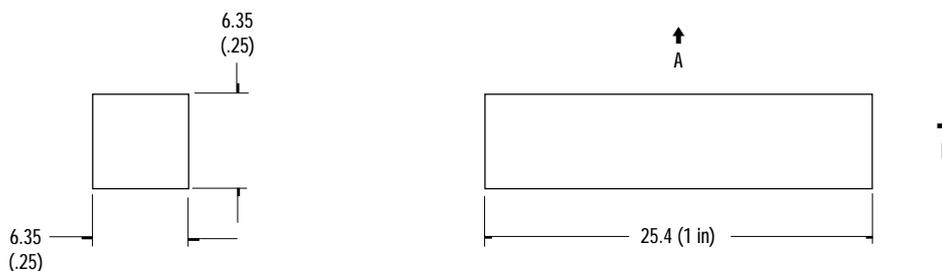

Drawings not to scale  
All dimensions in mm (inches)

## SPECIFICATION

Magnet material	Alnico/Alcomax
Gauss reading, direction A at 6.5mm	230
Gauss reading, direction B at 5mm	410
Maximum operating temperature	550°C

Alnico/Alcomax is a good general purpose material that can be machined or cast to the required shape before magnetizing. The material has the best temperature co-efficient of all permanent magnets. The high nickel content results in good corrosion and oxidation resistance

## RECTANGULAR MAGNET

PART NUMBER  
**RSH- 34**

Rev. No.	Revision Note	Date	Signature
B	Web Site 2001	1-4-01	RG

The Comus Group of Companies consist of:  
Assemtech Europe Limited  
E. Bachem GmbH  
Comus International  
W. Gunther GmbH  
Gunther Belgium  
Gunther France  
S.T.G.

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.