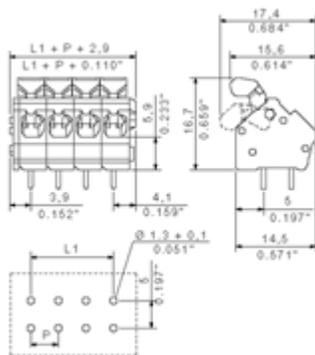


## LMZFL 5/2/135 3.5SW

View with Tabs | [List View](#)

## General ordering data

Order No.	1811510000
Type	LMZFL 5/2/135 3.5SW
Version	PCB terminal, 5.00 mm, No. of poles: 2, 135°, Solder pin length: 3.5 mm, tinned, black, Tension clamp connection, Clamping range, rated connection, max.: 2.5 mm², Box
Product data	IEC: 630 V / 24 A / 0.13 - 2.5 mm² UL: 300 V / 15 A / AWG 26 - AWG 14
EAN	4032248290611
Qty.	100 pc(s).
Packaging	Box

## Notes

## Notes

- Rated current related to rated cross-section and min. No. of poles.
- Wire end ferrule without plastic collar to DIN 46228/1
- Wire end ferrule with plastic collar to DIN 46228/4
- P on drg. = pitch
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.