

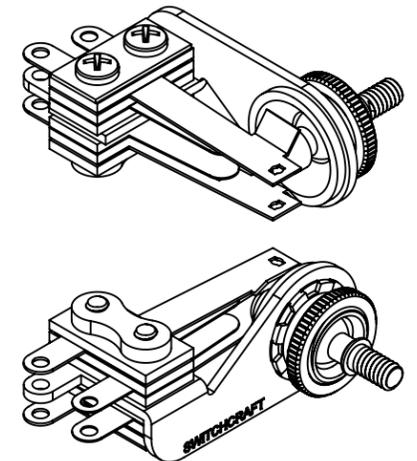


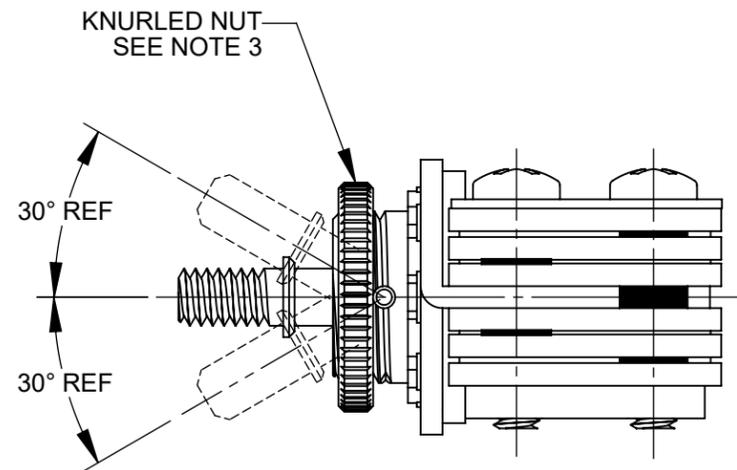

**SCHEMATIC**

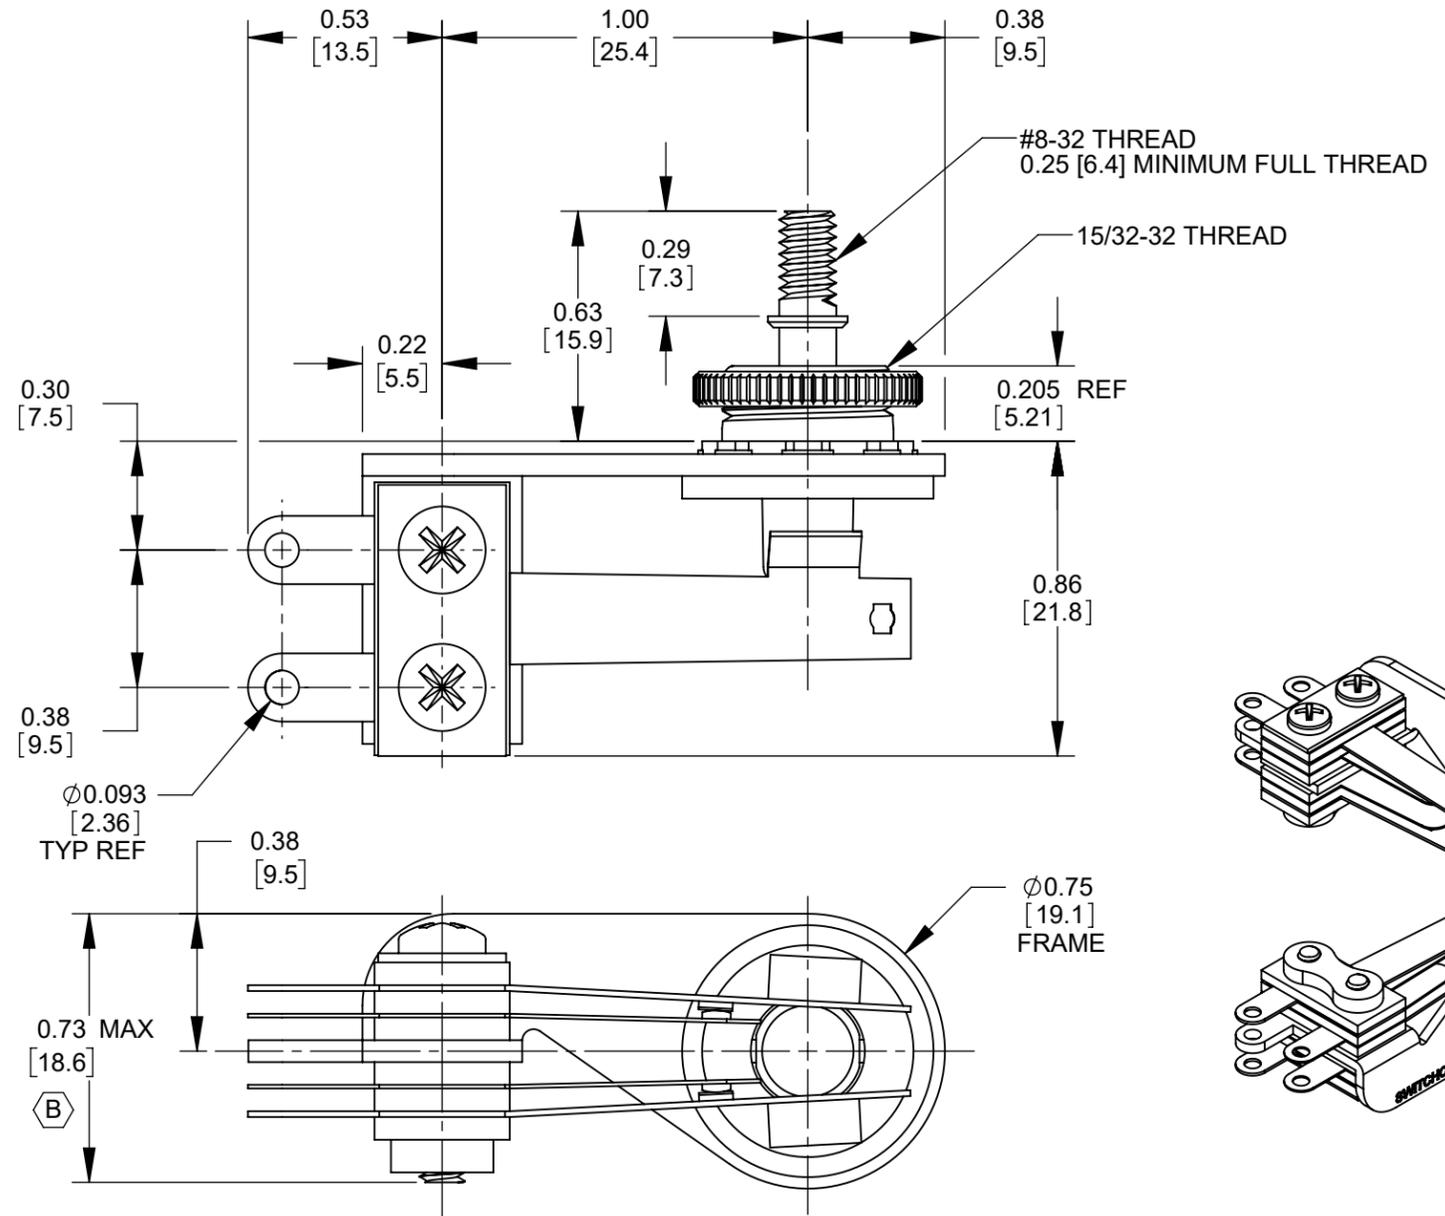

**NOTES:**

1. MATERIALS:  
 FRAME - STEEL, NICKEL PLATED  
 SPRINGS - SPRING TEMPERED, NICKEL SILVER  
 BUSHING & SHAFT - BRASS, NICKEL PLATED  
 INSULATION - PHENOLIC  
 CONTACTS - FINE SILVER  
 SCREWS - STEEL, NICKEL PLATED  
 SHAFT INSULATOR - NYLON  
 TUBING - THERMOPLASTIC  
 KNURLED NUT - BRASS, NICKEL PLATED
2. ELECTRICAL CHARACTERISTICS:  
 - CONTACT RESISTANCE: 20 MILLIOHMS MAX  
 - CONTACT RATING: 3A, 300W MAX AC NON-INDUCTIVE LOAD  
 - LEAKAGE RESISTANCE: 1000 MEGAOHMS OR GREATER  
 - DIELECTRIC STRENGTH: 250 VDC
3. HARDWARE SHIPPED UNASSEMBLED.
4. THIS PRODUCT IS RoHS COMPLIANT.

**CUSTOMER DRAWING**

					THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.						
					SIZE	WIDTH	MULT	LBS/M	TEMPER		
					UNLESS OTHERWISE SPECIFIED				MATERIAL SPEC No.		
					1. ALL DIMENSIONS IN INCHES [mm]				SCALE 2:1		
					- TWO PLACE DECIMALS ±0.02 [0.5]				Switchcraft®		
					- THREE PLACE DECIMALS ±0.005 [0.13]				SHEET 1 OF 1		
C	28409	07/09/21	PC	TJK	DATE DRAWN	BY	CHKD	APVD	PART No.	REV	
B	28121	12/11/18	PC	TJK	3/18/10	RS	RS	TJK	12013X	C	
A	26166	10/18/06	PC	TJK			3/18/10	02/12/20			
REV	ECO NUMBER	DATE	BY	APVD	NAME RIGHT-ANGLE LEVER SWITCH, 3 POSITION LOCKING, RoHS						
REVISIONS					DO NOT SCALE DRAWING						