

CDBW120-G Thru. CDBW140-G

Forward current: 1.0A

Reverse voltage: 20 to 40V

RoHS Device



Features

- For use in low voltage, high frequency inverters.
- Free wheeling, and polarity protection applications.

Mechanical Data


- Case: SOD-123, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Polarity: indicated by cathode end.
- Weight: 0.0097 gram(approx.).

Marking

CDBW120-G: SJ

CDBW130-G: SK

CDBW140-G: SL

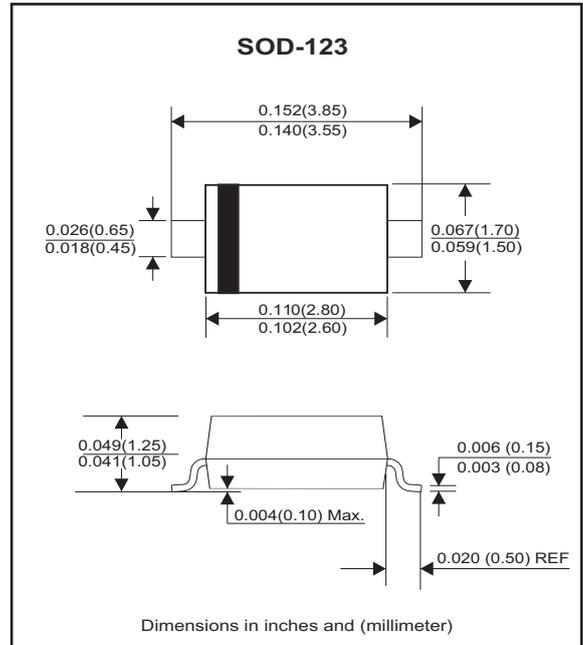

Circuit Diagram



Maximum Ratings (At Ta=25°C, unless otherwise noted)

Parameter	Symbol	CDBW120-G	CDBW130-G	CDBW140-G	Unit
Non-repetitive peak reverse voltage	V _{RM}	20	30	40	V
Peak repetitive peak reverse voltage	V _{R(RM)}	20	30	40	V
Working peak reverse voltage	V _{R(WM)}				
DC blocking voltage	V _R				
RMS reverse voltage	V _{R(RMS)}	14	21	28	V
Average rectified output current	I _O	1			A
Peak forward surge current @8.3ms	I _{FSM}	9			A
Repetitive peak forward current	I _{FRM}	1.5			A
Power dissipation	P _D	500			mW
Thermal resistance, junction to ambient	R _{θJA}	250			°C/W
Junction temperature	T _J	-55 ~ +125			°C
Storage temperature	T _{STG}	-55 ~ +150			°C

Electrical Characteristics (At Ta=25°C, unless otherwise noted)

Parameter		Conditions	Symbol	Min.	Max.	Unit
Reverse breakdown voltage	CDBW120-G	I _R =1mA	V _{BR}	20		V
	CDBW130-G			30		
	CDBW140-G			40		
Reverse voltage leakage current	CDBW120-G	V _R =20V	I _R		1	mA
	CDBW130-G	V _R =30V				
	CDBW140-G	V _R =40V				
Forward voltage	CDBW120-G	I _F =1A	V _F		0.45	V
	CDBW130-G				0.55	
	CDBW140-G			0.60		
	CDBW120-G	I _F =3A			0.75	
CDBW130-G			0.875			
CDBW140-G			0.90			
Diode capacitance		V _R =4V, f=1MHz	C _D		120	pF

RATING AND CHARACTERISTIC CURVES (CDBW120-G Thru. CDBW140-G)

Fig.1- Power Derating Curve

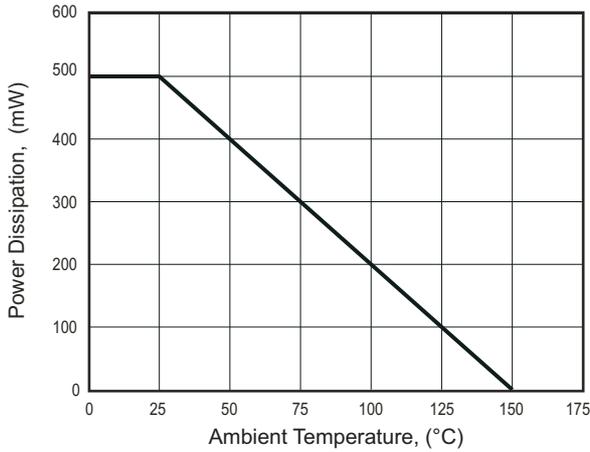


Fig.2- Maximum Non-Repetitive Peak Forward Surge Current

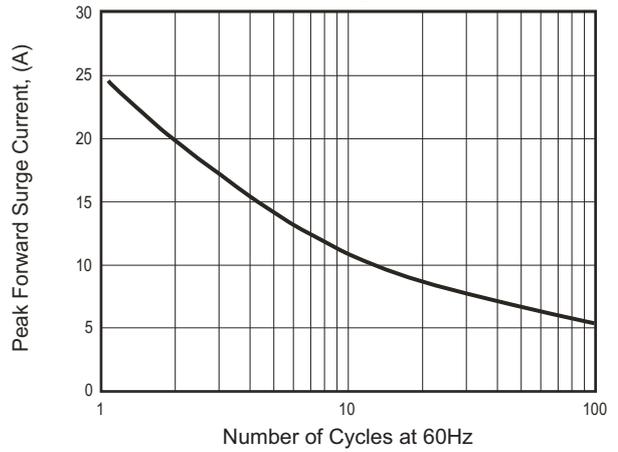


Fig.3- Typical Instantaneous Forward Characteristics

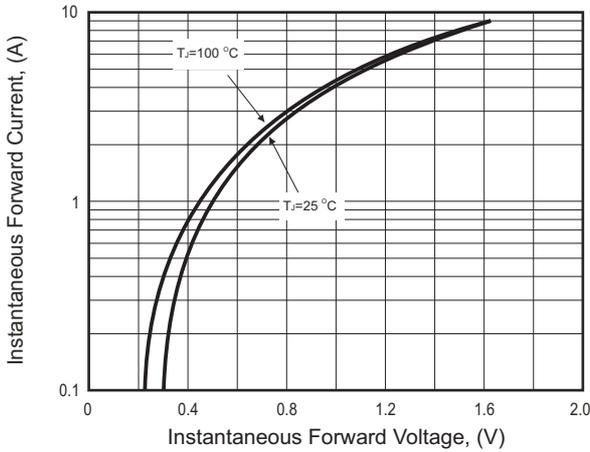


Fig.4- Typical Reverse Characteristics

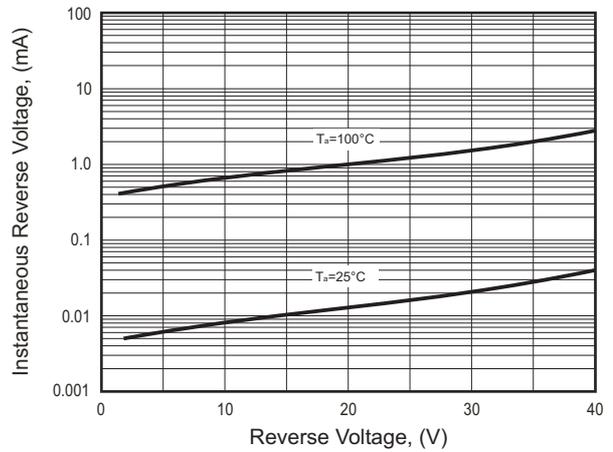


Fig.5- Typical Junction Capacitance



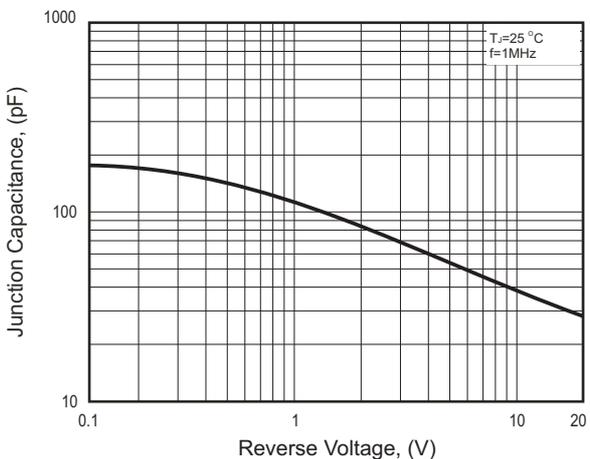


Fig.6- Typical Transient Thermal Impedance

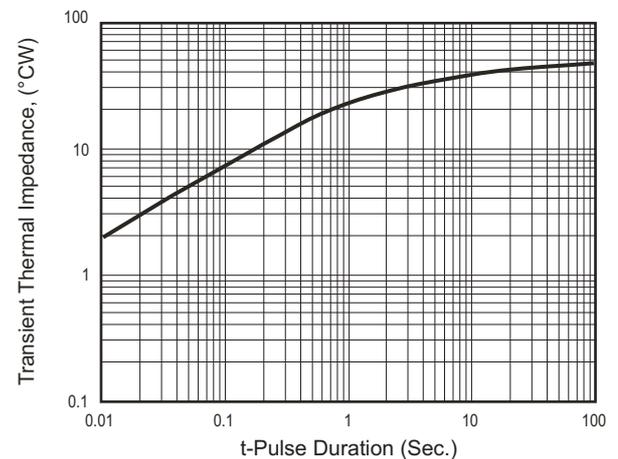

Reel Taping Specification

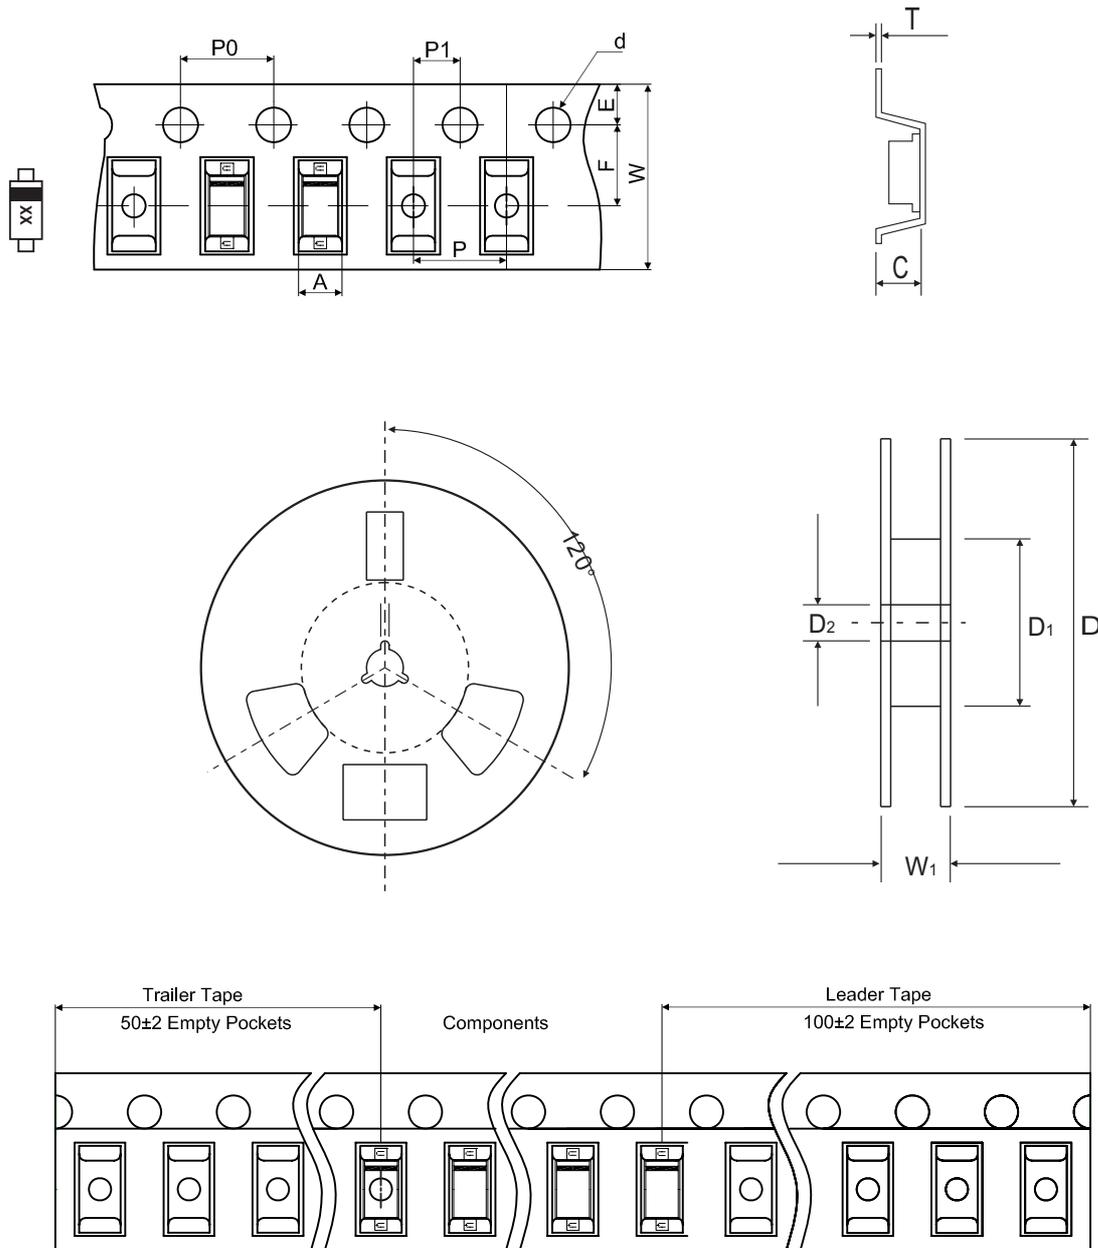

SOD-123	SYMBOL	A	B	C	d	D	D ₁	D ₂
	(mm)	1.85 ± 0.05	3.94 ± 0.05	1.57 ± 0.05	1.55 ± 0.10	178 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.073 ± 0.002	0.155 ± 0.002	0.062 ± 0.002	0.061 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOD-123	SYMBOL	E	F	P	P ₀	P ₁	W	W ₁
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 / - 0.10	12.30 ± 1.0
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 + 0.012 / - 0.004	0.484 ± 0.039

Company reserves the right to improve product design , functions and reliability without notice.

Marking Code


Part Number	Marking Code
CDBW120-G	SJ
CDBW130-G	SK
CDBW140-G	SL



xx = Product type marking code

Suggested PAD Layout

SIZE	SOD-123	
	(mm)	(inch)
A	3.24	0.128
B	0.80	0.031
C	1.00	0.039
D	4.04	0.159
E	2.44	0.096

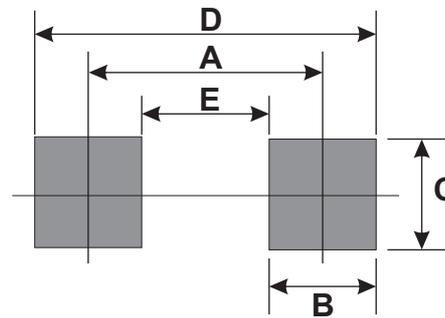

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOD-123	3,000	7