



4000 MHz Ceramic Bandpass Filter

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM4000B1250



Electrical specifications

Center Frequency: 4000 MHz
Bandwidth: Fo +/- 50 MHz
Return Loss: 12 dB min
Input / Output Impedance: 50 Ohms
Passband: 3950-4050 MHz
Passband Insertion Loss: 4.0dB max
Passband Ripple: 1.0 dB max
Rejection 1: 60 dB min @ DC-3745 MHz
Rejection 2: 40 dB min @ 3845 MHz
Rejection 3: 40 dB min @ 4160 MHz
Rejection 4: 60 dB min @ 4250-4500 MHz
Rejection 5: 70 dB min @ 4500-6450 MHz
Power Handling: 1 W
Group Delay Variation: 5 ns max

Mechanical


Mounting Method: SMT
Dimensions: 34 x 14 x 5 mm

Environmental

Operating Temperature: -40°C to 110°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

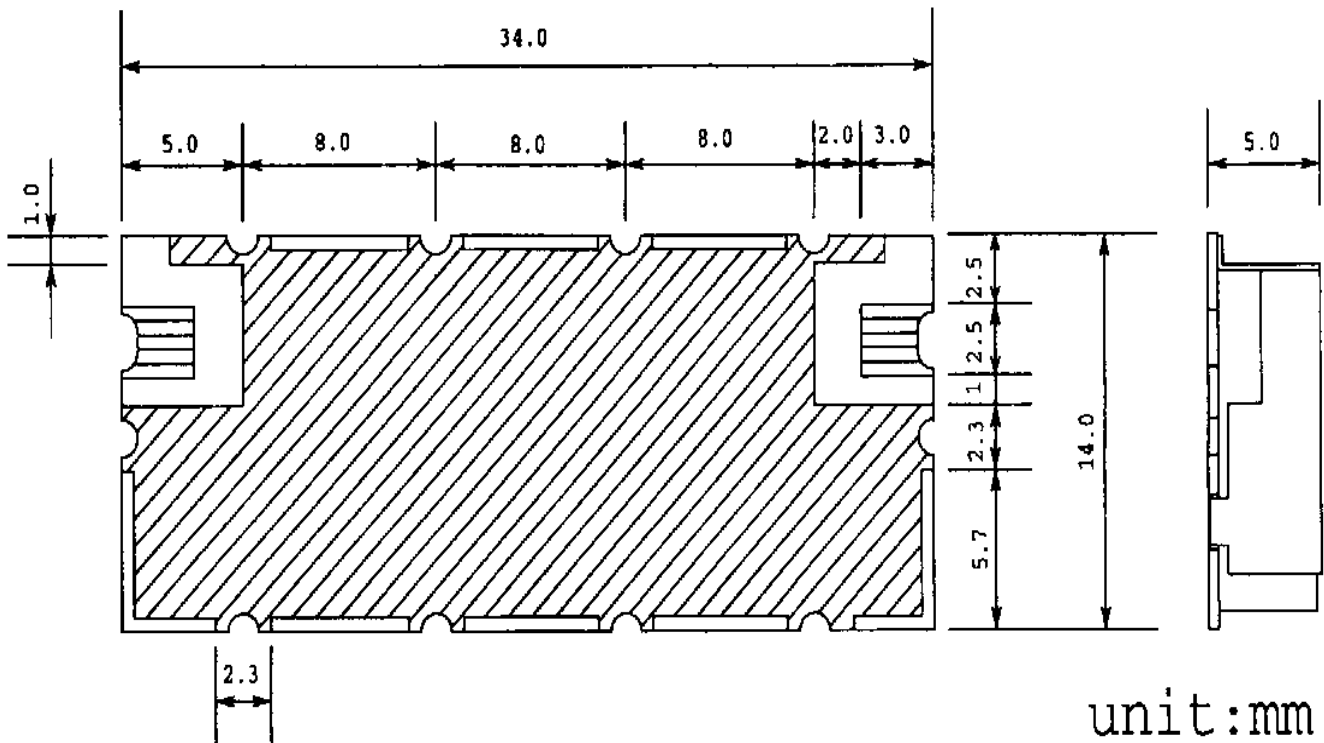

Tolerance: +/-0.01 inches [+/-0.3mm]

Angles: +/-1 Deg.

*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.



4000 MHz Ceramic Bandpass Filter

ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AM4000B1250



Response Plot:

