

# **SPECIFICATION**

Part No. : **PC24.09.0100A** 

Product Name : **TheStripe™** 850/900/1800/1900MHz GSM PCB

Antenna

100mm Ø1.13mm MMCX(M)RA Connector

Features : 42mm\*42mm\*1.6mm

Photo:





#### 1. Introduction

The PC24 Internal PCB Antenna is a compact square Quad-band GSM antenna for incorporation in antennas and transceiver modules to be used worldwide. Omni-directional gain across all bands ensures constant reception and transmission. Cables and connectors are fully customizable. Antennas can be tuned to customer housing on request.


## 2. Typical Antenna Performance in free space

Specifications  ELECTRICAL				
Band	824-896	880-960	1850-1990	1710-1880
Return Loss	-12 dB	-25 dB	-12 dB	-10 dB
Gain	Average 0 dBi			
Polarization	Linear			
Impedance	50 ohms			
Input Power	10 watts			
Input Connection	Coaxial Cable – Ipex 1.13 100mm MHF Standard, Fully customizable			
VSWR (Min performance)	<2.0:1			
MECHANICAL				
Dimensions (L x W)	42 mm x 42mm			

<sup>\*</sup>note: specifications may be subject to change




# 3.Drawing

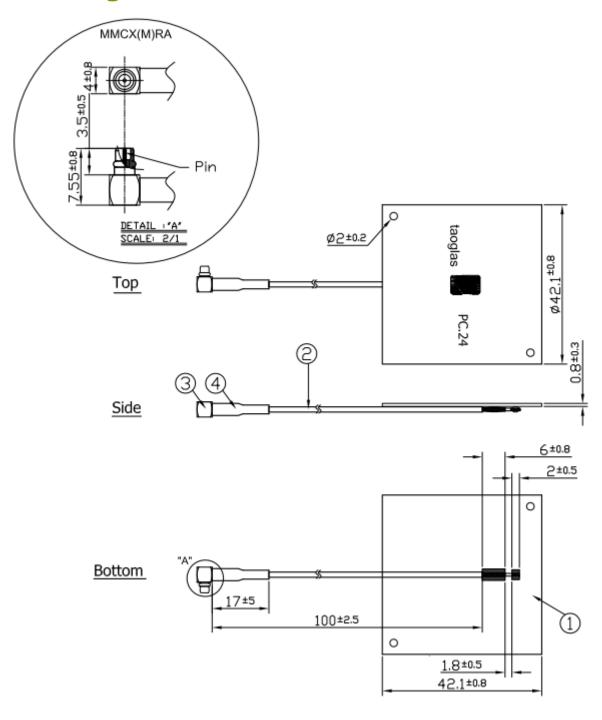



## 4.S11 Magnitude


## S11 Magnitude

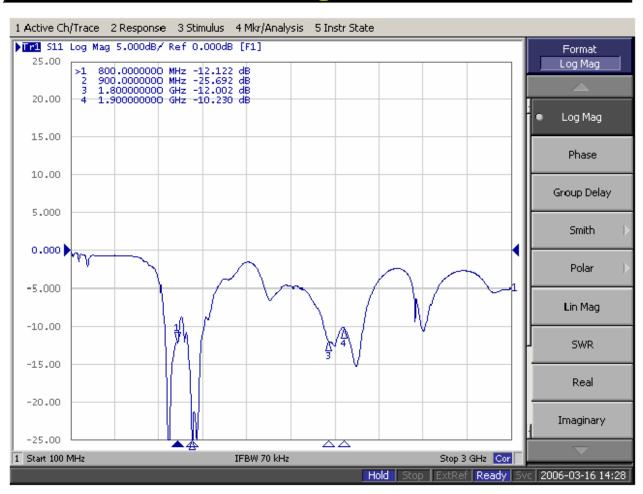



### 5. Radiation Patterns


### 800 MHz - 3D Radiation Pattern

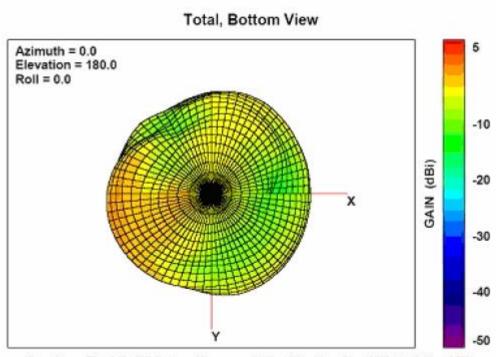

Free-Space Total GAIN, Bottom View, ~ paNodes [2] <dStartFreqMHz %-0.1f>> MHz




### 900 MHz - 3D Radiation Pattern

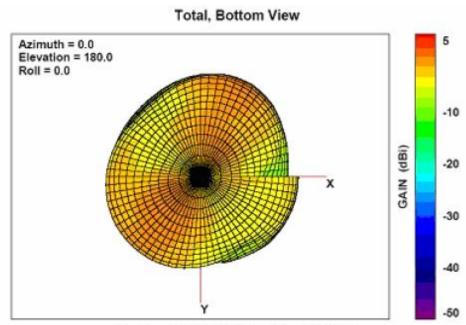

Free-Space Total GAIN, Bottom View, 900.0 MHz

#### 1800 MHz - 3D Radiation Pattern

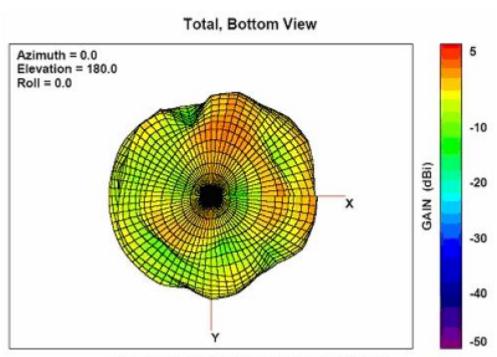

Free-Space Total GAIN, Bottom View, 1800.0 MHz



## 1900 MHz - 3D Radiation Pattern

