



**X2-Class
Power MOSFET**
**IXTK120N65X2
IXTX120N65X2**

N-Channel Enhancement Mode
Avalanche Rated




V_{DSS} = 650V
I_{D25} = 120A
R_{DS(on)} ≤ 23mΩ

TO-264P (IXTK)



PLUS247 (IXTX)



G = Gate D = Drain
S = Source Tab = Drain

| Symbol | Test Conditions | Maximum Ratings | | |
|-------------------|--|-------------------|--|----------|
| V _{DSS} | T _J = 25°C to 150°C | 650 | | V |
| V _{DGR} | T _J = 25°C to 150°C, R _{GS} = 1MΩ | 650 | | V |
| V _{GSS} | Continuous | ± 30 | | V |
| V _{GSM} | Transient | ± 40 | | V |
| I _{D25} | T _C = 25°C | 120 | | A |
| I _{DM} | T _C = 25°C, Pulse Width Limited by T _{JM} | 240 | | A |
| I _A | T _C = 25°C | 15 | | A |
| E _{AS} | T _C = 25°C | 3.5 | | J |
| P _D | T _C = 25°C | 1250 | | W |
| dv/dt | I _S ≤ I _{DM} , V _{DD} ≤ V _{DSS} , T _J ≤ 150°C | 50 | | V/ns |
| T _J | | -55 ... +150 | | °C |
| T _{JM} | | 150 | | °C |
| T _{stg} | | -55 ... +150 | | °C |
| T _L | Maximum Lead Temperature for Soldering | 300 | | °C |
| T _{sold} | Plastic Body for 10s | 260 | | °C |
| M _d | Mounting Torque (TO-264P) | 1.13/10 | | Nm/lb.in |
| F _c | Mounting Force (PLUS247) | 20..120 / 4.5..27 | | N/lb |
| Weight | TO-264P | 10 | | g |
| | PLUS247 | 6 | | g |

| Symbol | Test Conditions (T _J = 25°C Unless Otherwise Specified) | Characteristic Values | | |
|---------------------|---|-----------------------|-----------|------|
| | | Min. | Typ. | Max. |
| BV _{DSS} | V _{GS} = 0V, I _D = 1mA | 650 | | V |
| V _{GS(th)} | V _{DS} = V _{GS} , I _D = 1mA | 3.0 | | V |
| I _{GSS} | V _{GS} = ± 30V, V _{DS} = 0V | | ± 200 | nA |
| I _{DSS} | V _{DS} = V _{DSS} , V _{GS} = 0V T _J = 125°C | | 25 500 | μA |
| R _{DS(on)} | V _{GS} = 10V, I _D = 0.5 • I _{D25} , Note 1 | | 23 | mΩ |

Features

- International Standard Packages
- Low Q_G
- Avalanche Rated
- Low Package Inductance

Advantages

- High Power Density
- Easy to Mount
- Space Savings

Applications

- Switch-Mode and Resonant-Mode Power Supplies
- DC-DC Converters
- PFC Circuits
- AC and DC Motor Drives
- Robotics and Servo Controls

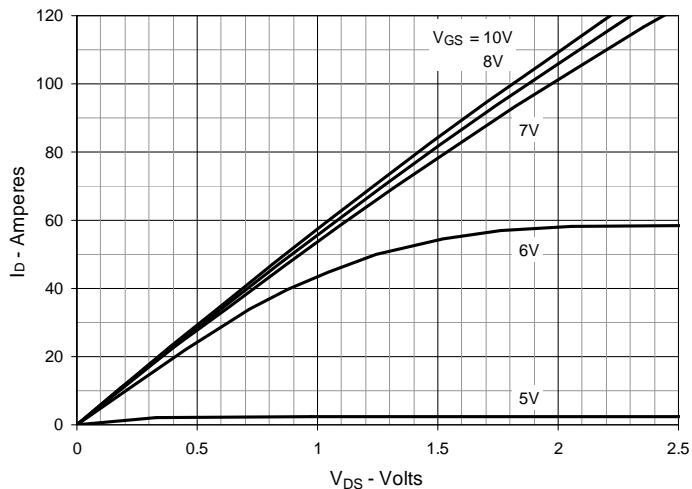
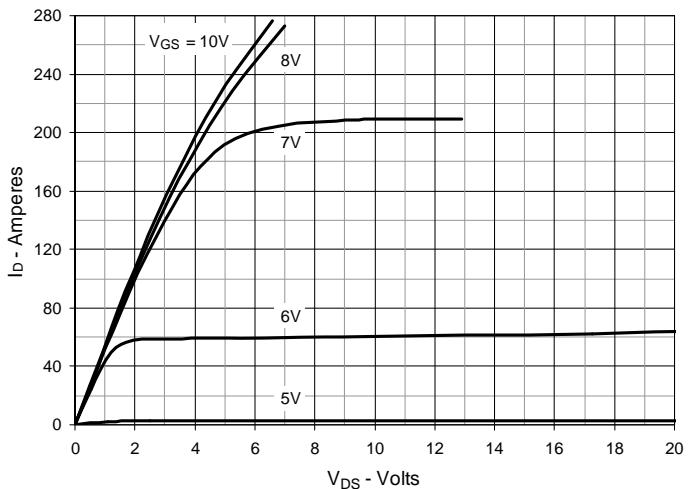
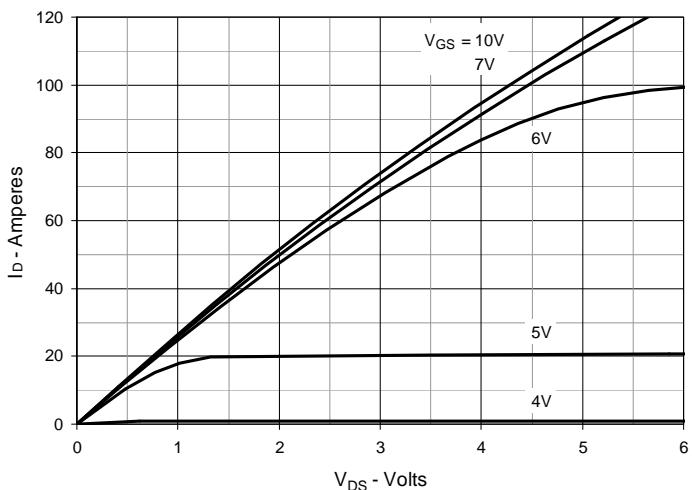
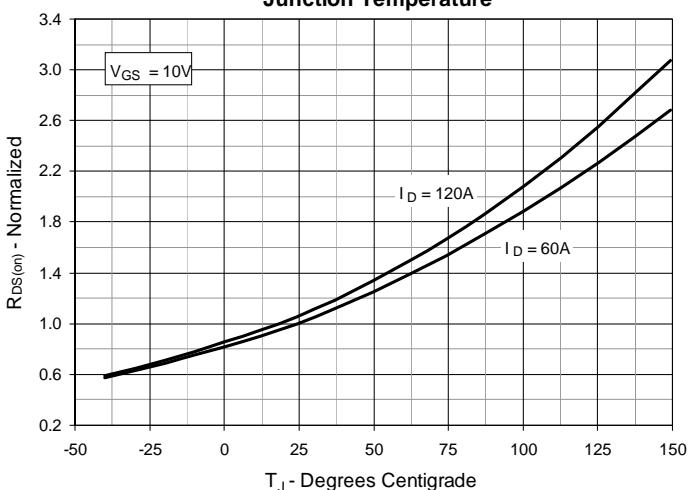
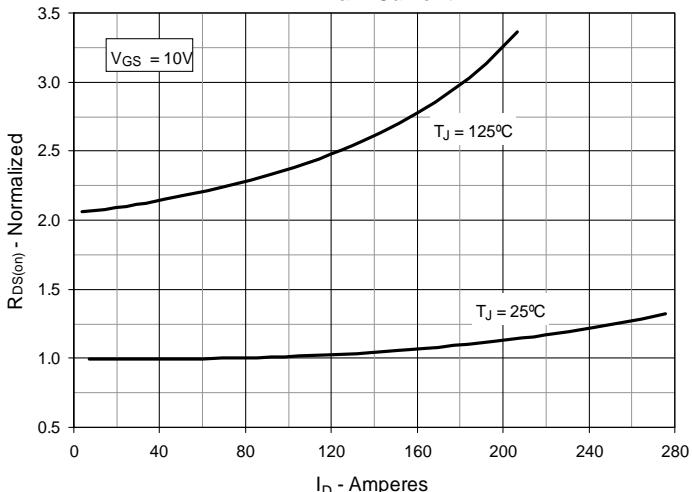
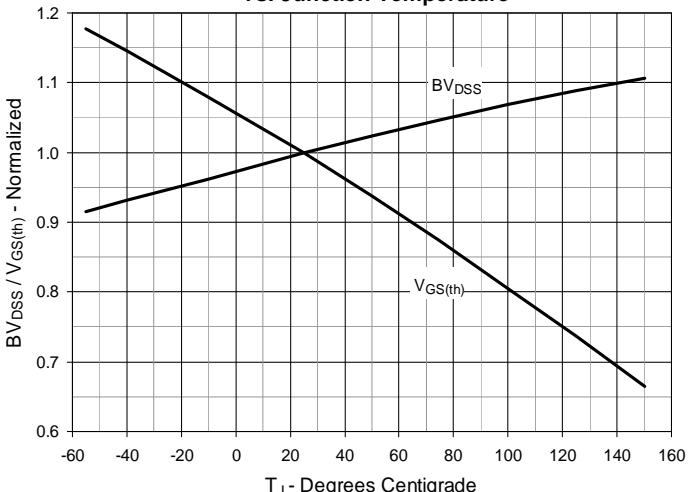
Fig. 1. Output Characteristics @ $T_J = 25^\circ\text{C}$

Fig. 2. Extended Output Characteristics @ $T_J = 25^\circ\text{C}$

Fig. 3. Output Characteristics @ $T_J = 125^\circ\text{C}$

Fig. 4. $R_{DS(on)}$ Normalized to $I_D = 60\text{A}$ Value vs. Junction Temperature

Fig. 5. $R_{DS(on)}$ Normalized to $I_D = 60\text{A}$ Value vs. Drain Current

Fig. 6. Normalized Breakdown & Threshold Voltages vs. Junction Temperature


Fig. 7. Maximum Drain Current vs. Case Temperature

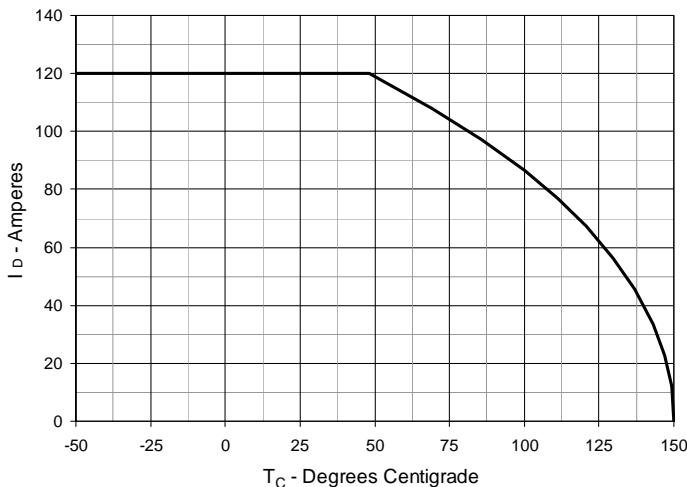


Fig. 8. Input Admittance

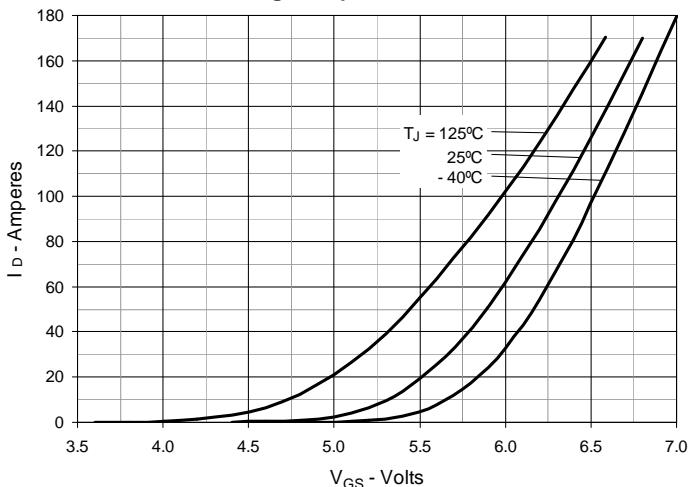


Fig. 9. Transconductance

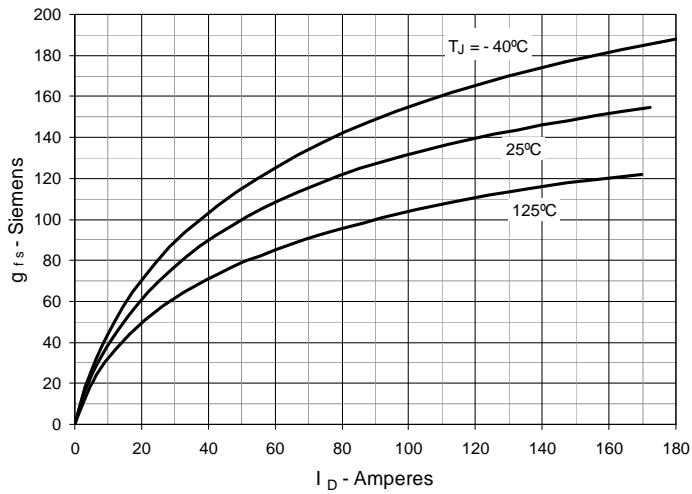


Fig. 10. Forward Voltage Drop of Intrinsic Diode

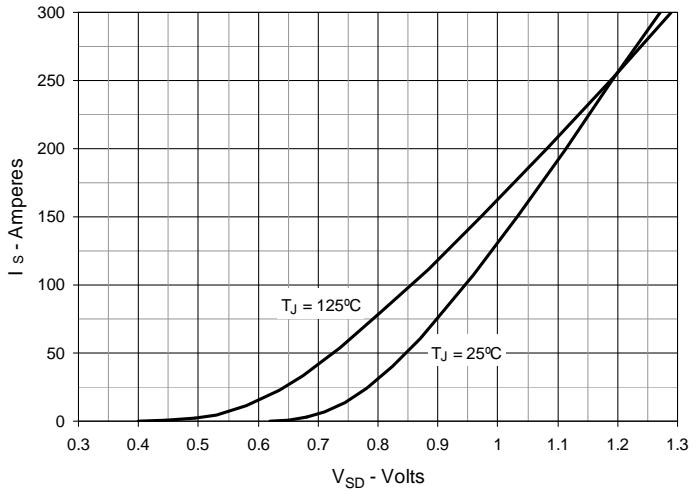


Fig. 11. Gate Charge

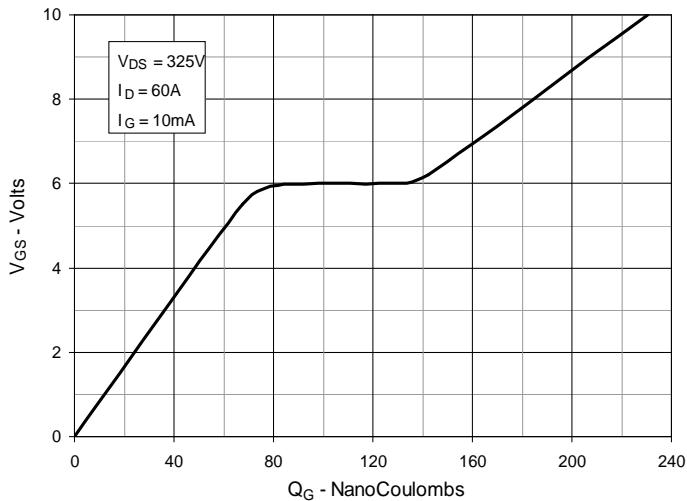


Fig. 12. Capacitance




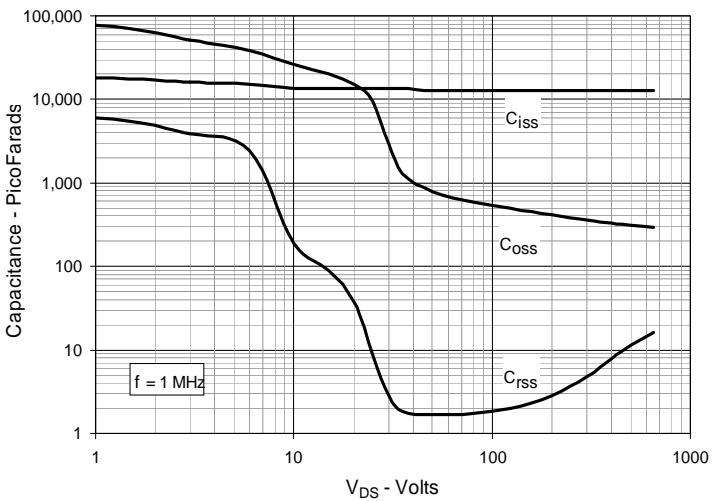


Fig. 13. Output Capacitance Stored Energy

Fig. 14. Forward-Bias Safe Operating Area

Fig. 15. Maximum Transient Thermal Impedance

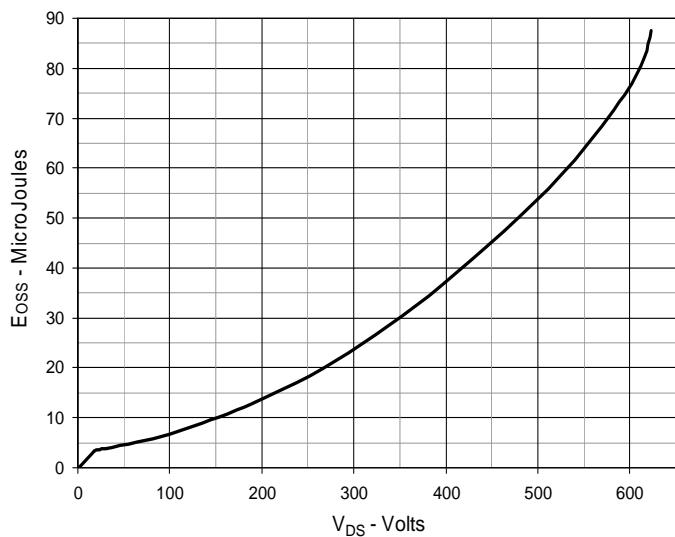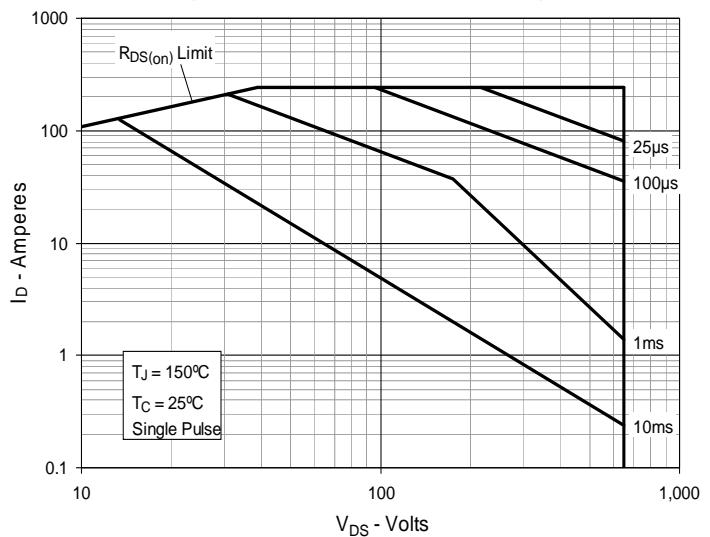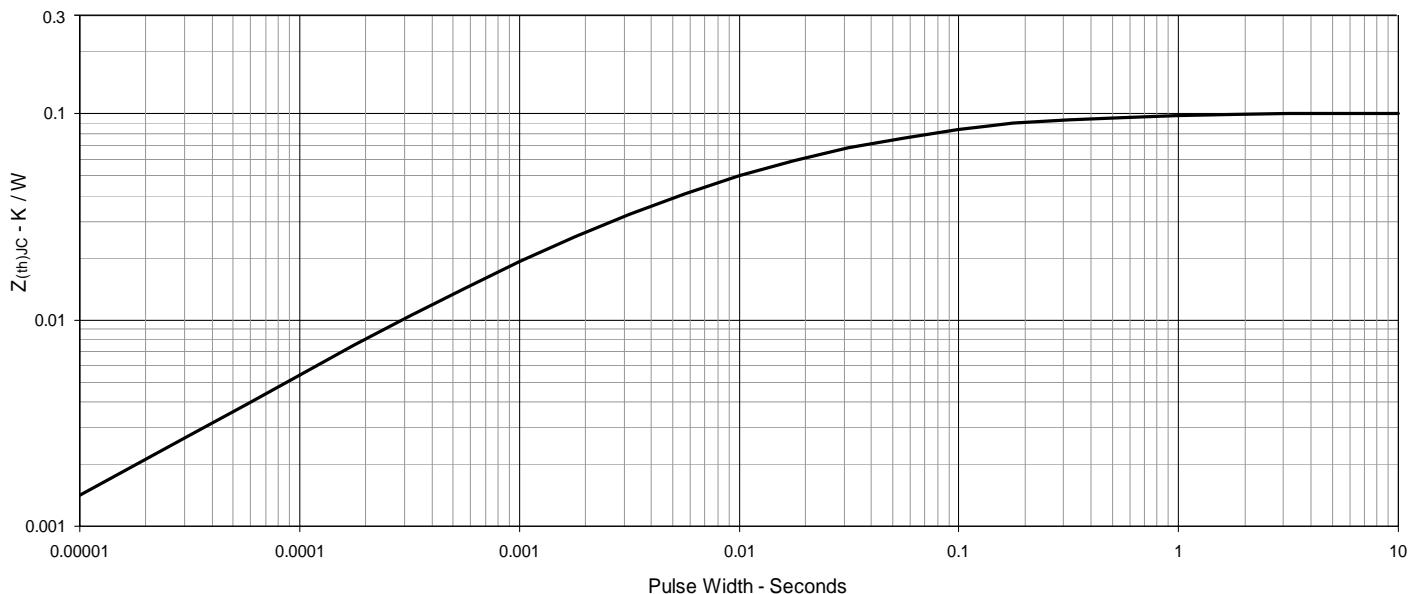


Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.