

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, MITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.


© 2005, Projects Unlimited Inc.

SPEC	CIFI	CA	TIO	NS

	_	
PARAMETERS	VALUES	UNITS
RATED INPUT POWER	0.5	W
MAX INPUT POWER	0.8	W
IMPEDANCE	4±15%	ОНМ
OUTPUT SPL @ 0.5W/0.1M (AT 1.0, 1.6, 2.0, 3.2 kHz)	87±3	dBA
DISTORTION (MAX.)	5%	-
RESONANT FREQUENCY	800±20%	Hz
FREQUENCY RANGE	640 ~ 20,000	Hz
HOUSING MATERIAL	LCP	-
CONE MATERIAL	KAPTON	-
MAGNET MATERIAL	SmCo	-
OPERATING TEMPERATURE	−30 ~ +85	°C
WEIGHT	1.5	grams

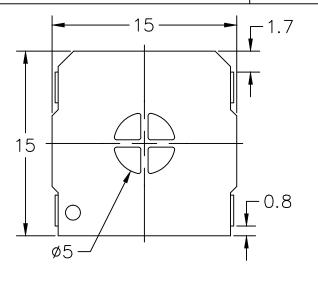

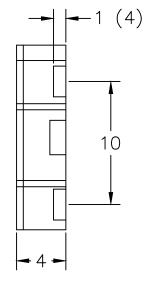

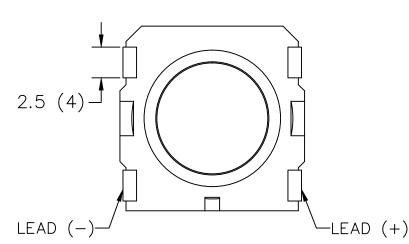

REVISIONS

DATE

4/9/12

APPROVED

DESCRIPTION

RELEASED FROM ENGINEERING

LTR

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATION SUBJECT TO CHANGE OR WITHDRAWAL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

SMS-1504MS-2-R.DWG

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN
MILLIMETERS, TOLERANCES ARE ±0.5 AND
ANGLES ARE ±3.

3541 Stop Eight Road Dayton, Ohio 45414

APPROVALS D		DATE					
DRAWN	10	1/12	JI LANLIN				
	U.D.	4/12	SIZE		DRAWING NO.		
CHECKED	M.L.	4/12	Α		SMS-1504MS-2-R		
APPROVED	B.R.	4/12	SCALE:	N.T.S.	SHEET 1 OF	1	