

STANLEY


SINGLE COLOR LED

5mm Round Shape

**D_5305S / F_5365S Series**

HIGH BRIGHTNESS COLOR

Outline Dimensions

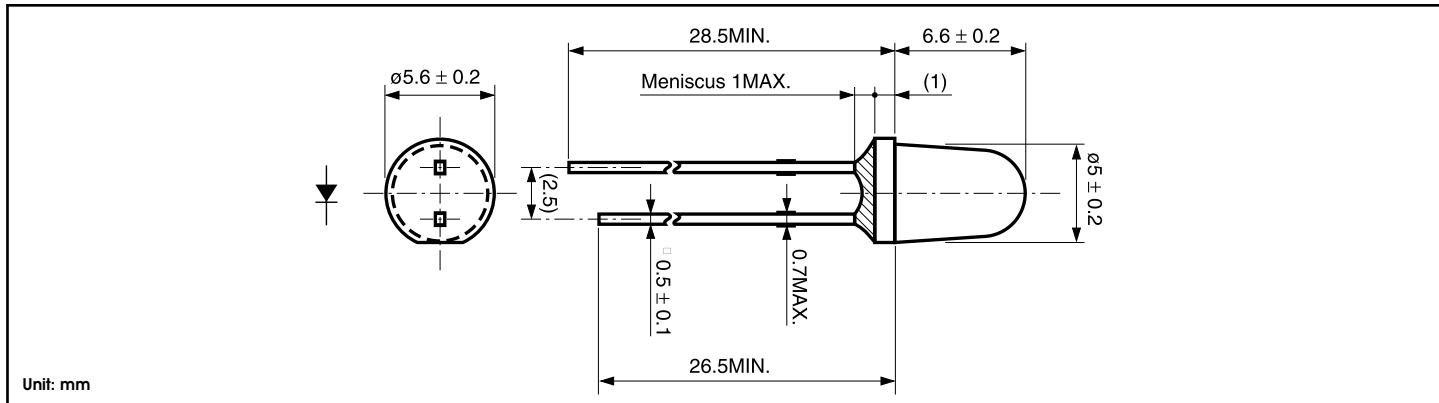

Absolute Maximum Ratings

(Ta=25°C)

Item	Symbol	Blue	Blue Green	Green	Yellow		Orange		Red		Units
		DB	DC	DG	EFY	FY	EFA	FA	EFR	FR	
Power Dissipation	Pd	100	100	100	125	125	125	125	125	125	mW
Forward Current	I _F	25	25	25	50	50	50	50	50	50	mA
Peak Forward Current	I _{FM}	60	60	60	200	200	200	200	200	200	mA
Reverse Voltage	V _R	5	5	5	5	5	5	5	5	5	V
Operating Temperature	T _{opr}	-40 to +85								°C	
Storage Temperature	T _{stg}	-40 to +100								°C	
Derating (DC)*	I _F	0.33			0.67					mA/°C	

* Ta=25°C, I_{fm} applies for the pulse width 1msec, and duty cycle 1/20
The current derating for operation applies when the temperature is above 25°C


Electro-Optical Characteristics

*The viewing angle is an average and will vary by color

(Ta=25°C)

Part No.	Material	Emitted Color	Lens Color	Luminous Intensity I _V		Wavelength Spectral Line Half Width				Forward Voltage V _F			Reverse Current I _R MAX.	Viewing Angle (2 1/2)									
				MIN.	TYP.	I _F TYP.	Peak d TYP.	Dominant TYP.	Half Width TYP.	I _F	TYP.	MAX.	I _F										
DB5305S	InGaN/SiC	Blue	Water Clear	120	240	20	467	470	26	20	3.5	4.0	20	100	5								
DC5305S	InGaN/SiC	Blue Green		400	800	20	502	505	30	20	3.5	4.0	20	100	5								
DG5305S	InGaN/SiC	Green		400	800	20	522	525	30	20	3.5	4.0	20	100	5								
EFY5365S	AlInGaP	Yellow	Clear Pastel Yellow	700	1,000	20	592	590	15	20	1.9	2.4	20	100	5								
FY5365S				250	500	20																	
EFA5365S	AlInGaP	Orange	Clear Pastel Orange	820	1,160	20	609	605	15	20	1.9	2.4	20	100	5								
FA5365S				290	580	20																	
EFR5365S	AlInGaP	Red	Clear Pastel Red	620	880	20	635	626	15	20	1.9	2.4	20	100	5								
FR5365S				220	440	20																	
Units				mcd		mA		nm		mA		V		mA									
														Deg.									

Spatial Distribution (x)

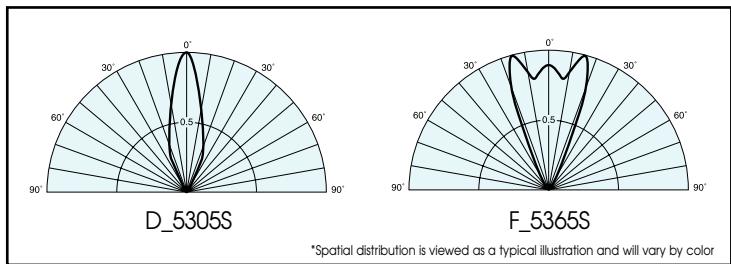

Operation Current Derating Chart

