

Socket for PCBs; angled; 5-pole; Cod. I; blue

www.wago.com/770-3105/011-000



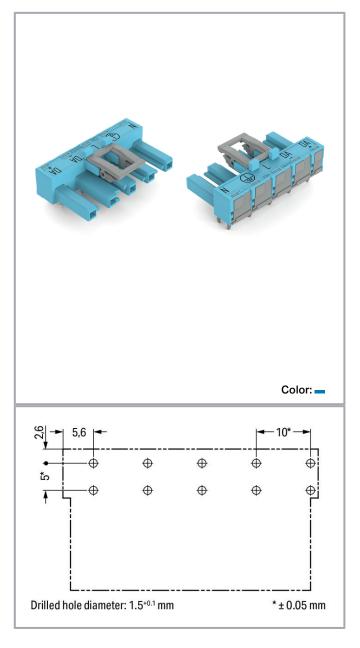



 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-3105/011-000



#### Item description

#### Female connector/socket WINSTA® MIDI rated current 25 A

The WINSTA® MIDI female connector/socket 5-pole are compact but outstanding PCB terminal blocks. They offer convenient operation and the greatest flexibility for installation. Our pluggable PCB connectors give you a universal pluggable connection system for your devices that meets all the requirements for a stable device connection that is easy to put into operation. The mechanical coding and color coding of the pcb connector ensure error-free installation of the individual components – including protection against mismating. WINSTA® MIDI pcb connectors with I coding in blue are primarily suitable for lighting management, for example for the dimming function of DALI lights. Important parameters in the selection of a pcb connector are the rated current and voltage: They provide information about possible domains of use and applications. This product has a current rating of 25 A – so it is also suitable for high power loads. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in can be found in a variety of projects you can use for quick, easy, flexible, and secure electrical installation.

#### Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MIDI

The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and therefore faster, more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and installation errors at the construction site. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with *WINSTA*® MIDI pcb connectors with protection against mismating from WAGO.

- protection against mismating eliminates errors
- simple circuits
- with I coding for use in the automation of buildings (lighting control)
- convenient installation and commissioning

# Data Electrical data

#### Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	400 V
Rated impulse voltage (III/3)	6 kV
Rated current	25 A
Legend (ratings)	(III / 3) ≙ Overvoltage category III / Pollution degree 3

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-3105/011-000



## Ratings per UL 1977

Note for the US market	Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.
Rated voltage (UL 1977)	600 V
Rated current UL 1977	23 A

## General

Note on contact resistance	approx. 1 m $\Omega$ of contact resistance
	approx. 0.25 m $\Omega$ contact transition plug/socket

### Connection data

Total number of potentials	5
Number of levels	1

## **Connection 1**

Pole number	5

## Physical data

Pin spacing	10 mm / 0.394 inches
Width	47 mm / 1.85 inches
Height	18.1 mm / 0.713 inches
Height from the surface	14.6 mm / 0.575 inches
Depth	26 mm / 1.024 inches
Solder pin length	3.5 mm
Solder pin dimensions	1 x 0.8 mm
Drilled hole diameter with tolerance	1.5 <sup>(-0.1</sup> <sup>+0.1)</sup> mm

#### **Mechanical Data**

Application	DALI, Lighting Management
Coding	
Variable coding	No
Marking	N
Potential marking	N
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-3105/011-000



Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Design	angled

## Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for PCB
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Mating direction to the PCB	0°
Locking lever	yes
Locking of plug-in connection	locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

### **PCB** contact

PCB contact	ТНТ
Solder pin arrangement	2 in-line solder pins/pole
Number of solder pins per potential	2

## **Material Data**

Note (material data)

Information on material specifications can be found here

Color	blue
Insulation material	Polyamide (PA66)
Flammability class per UL94	VO
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-3105/011-000



Fire load	0.184 MJ
Weight	10 g

## **Environmental requirements**

Processing temperature	-5 +40 ℃
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

### Commercial data

eCl@ss 10.0	27-44-06-05
eCl@ss 9.0	27-44-06-05
ETIM 8.0	EC002560
ETIM 7.0	EC002560
PU (SPU)	50 pcs
Packaging type	box
Country of origin	PL
GTIN	4045454001315
Customs tariff number	85366990990

## **Environmental Product Compliance**

# Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	<b>cURus</b> Underwriters Laboratories Inc.	UL 1977	E45171

## Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
CIR	LR Lloyds Register	IEC 61984	LR22429487TA

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-3105/011-000



## Counterpart

THE STATE OF THE S	Item no.770-1115 Plug; 5-pole; 4,00 mm²; blue	www.wago.com/770-1115
	Item no.770-1115/022-000 Plug; with strain relief housing; 5-pole; Cod. I; 4,00 mm²; blue	www.wago.com/770-1115 /022-000
	Item no.771-9985/006-101 pre-assembled interconnecting cable; Eca; Socket/plug; 5-pole; Cod. I; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; blue	www.wago.com/771-9985 /006-101
	Item no.771-9985/206-101 pre-assembled connecting cable; Eca; Plug/open-ended; 5-pole; Cod. I; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; blue	www.wago.com/771-9985 /206-101

## Required accessories

Cover		
Cover		
1	Item no.: 770-201 Lockout cap; 12-pole, separable; for sockets; Plastic; black	www.wago.com/770-201
Life State Balletine	Item no.: 770-221 Lockout cap; 12-pole, separable; for sockets; Plastic; white	www.wago.com/770-221

# Downloads CAD/CAE-Data

2D/3D Models 770-3105/011-000

### **CAD** data

CAE data		
EPLAN Data Portal 770-3105/011-000	URL	Download
WSCAD Universe 770-3105/011-000	URL	Download
ZUKEN Portal 770-3105/011-000	URL	Download
EPLAN Data Portal 770-3105/011-000	URL	Download
WSCAD Universe 770-3105/011-000	URL	Download

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

URL

Download

www.wago.com/770-3105/011-000



#### **PCB** Design

Symbol and Footprint 770-3105/011-000

URL Download

CAx data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

### Supported formats:

- Accel EDA 14 & 15
- Altium 6 to current version
- Cadence Allegro
- DesignSpark
- Eagle Libraries
- KiCad
- Mentor Graphics BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

### **Environmental Product Compliance**

### Compliance Search

Environmental Product Compliance 770-3105/011-000

URL

Download

Socket for PCBs; angled; 5-pole; Cod. I; blue

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-3105/011-000



**Installation Notes** 

**Product family** 

WINSTA® MIDI

Show all products from the family

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.