Customer Information

DRAWING No - M80-5000000MP-XX-XXX-00-000 NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm



MATERIAL: MOULDING: GLASS FILLED PPS. UL94V-O. BLACK COAX CONTACT:

BODY, SLEEVE, INNER CONTACT,

END PLUG = COPPER ALLOY

LATCHING COLLAR = BERYLLIUM COPPER

INSULATOR = PTFE

BOARDMOUNT JACKSCREW, SCREW = STAINLESS STEEL

FINISH:

COAX CONTACT:

BODY, SLEEVE, INNER CONTACT, END PLUG = GOLD

LATCHING COLLAR = NICKEL

ELECTRICAL:

WORKING VOLTAGE = 800V AC/DC VOLTAGE PROOF = 1200V AC/DC

INSULATION RESISTANCE = $100M\Omega$ MIN

COAX CONTACT:

FREQUENCY RANGE = 6GHz

IMPEDANCE = 50Ω

 $V.S.W.R = 1.05 + (0.04 \times FREQUENCY) GHz MAX$

CONTACT RESISTANCE = $6m\Omega$ MAX

INSULATION RESISTANCE = $10^6 \text{M}\Omega$ @250V AC OPERATING VOLTAGE = 180V AC @ 500mA MAXIMUM VOLTAGE = 1000V AC

MECHANICAL:

DURABILITY = 500 OPERATIONS

COAX CONTACT:

INSERTION FORCE = 8N MAX WITHDRAWAL FORCE = 0.5N MIN


ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +125°C

PACKING:

BAG

FOR COMPLETE SPECIFICATION SEE COMPONENT SPECIFICATION COO5XX (LATEST ISSUE)

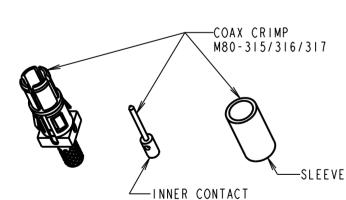

DIMENSION	CALCULATION
DIM 'A'	4 x No. OF CONTACTS - 4.00
DIM 'B'	4 x No. OF CONTACTS + 5.00
DIM 'C'	4 x No. OF CONTACTS + 10.00

EXAMPLE I: CONNECTOR WITH 08 COAX CONTACTS, M80-500000MP-08-315-00-000

DIM 'A' = 28.00mm, DIM 'B' = 37.00mm, DIM 'C' = 42.00mm

www.harwin.com technical@harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT

OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION. UNLESS STATED

90° COAX STRIPPING DIMENSIONS

TOLERANCES X. = ±1mm X.X = ±0.50mi $X.XX = \pm 0.10$ mm X.XXX = ±0.01mm

FINISH: ANGLES = ±5°

02 TO 12

SPECIAL CONTACTS

316 - COAX CONTACT

S/AREA:

MATERIAL: SEE ABOVE

SEE ABOVE

315 = COAX CONTACT 2.00mm CRIMP M80-315

CRIMP M80-316

SECTION Z-Z

2 x M2x0.4

TOTAL No. OF CONTACTS -

DATAMATE MIX-TEK PC TAIL MALE ASSY WITH BOARD MOUNT J/SCREWS

CHECKED:

CUSTOMER REF.:

ASSEMBLY DRG:

DRAWN:

S. BENNETT

R.ADDE

M80-315/316/317

x No. OF CONTACTS

M80-318/319

x No. OF CONTACTS

-10.30-

MAX


(13.4)

7.85

MAX

DRAWING NUMBER:

M80-5000000MP-XX-XXX-00-000 0F

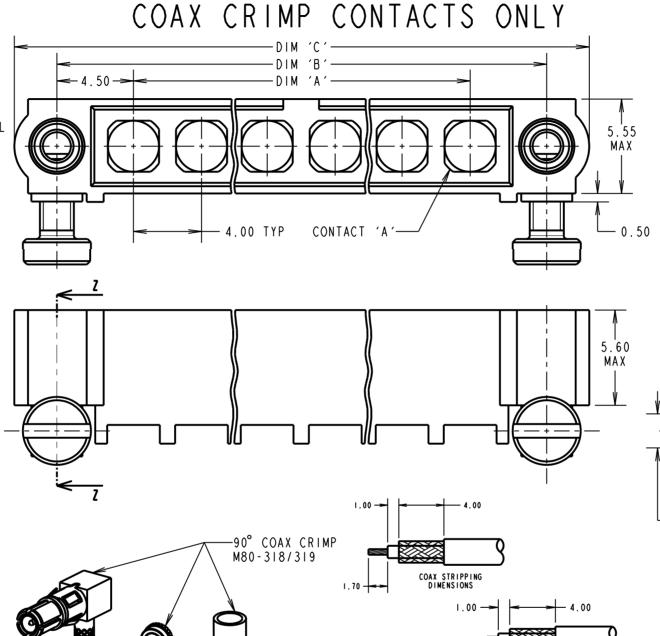

CRIMP/SOLDER NOTES: I. CONNECTORS ARE SUPPLIED WITH CONTACTS AND SCREWS LOOSE.

2. COAX CONTACT IS SUPPLIED AS A KIT OF PARTS: BODY, MAIN INSULATOR, INNER CONTACT AND LATCHING COLLAR ARE PRE-ASSEMBLED. SLEEVE AND INSULATED END PLUG ASSEMBLY ARE SEPARATE.


3. FOR EXTRA COAX CONTACTS, USE PART NUMBERS M80-315/316/317/318/319.

COAX CONTACT EXTRACTION TOOL = Z80-290.

5. RECOMMENDED HAND CRIMP TOOL FOR INNER COAX CONTACT = Z80-292 WITH POSITIONER Z80-291. RECOMMENDED HAND CRIMP TOOL AND DIE SET FOR SLEEVE = Z80-293.

INSTRUCTION SHEETS ARE AVAILABLE.

7. THIS ASSEMBLY CAN ONLY MATE WITH FP FEMALE FIXINGS.

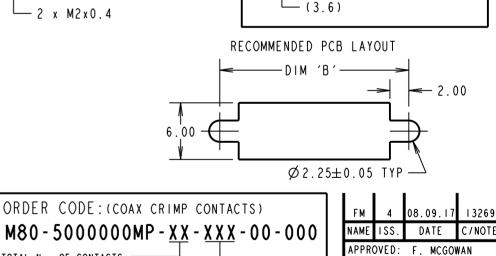

Customer Information

DRAWING No - M80-5000000MP-XX-XXX-00-000 NOT TO SCALE IF IN DOUBT - ASK THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

SPECIFICATIONS:

MATERIAL: MOULDING: GLASS FILLED PPS. UL94V-O. BLACK

POWER CONTACT:

BODY, SLEEVE, INNER CONTACT, END PLUG = COPPER ALLOY

LATCHING COLLAR = BERYLLIUM COPPER

INSULATOR = PTFE

BOARDMOUNT JACKSCREW, SCREW = STAINLESS STEEL

FINISH:

POWER CONTACT:

BODY. SLEEVE. INNER CONTACT. END PLUG = GOLD

LATCHING COLLAR = NICKEL

ELECTRICAL:

WORKING VOLTAGE = 800V AC/DC VOLTAGE PROOF = 1200V AC/DC

INSULATION RESISTANCE = $100M\Omega$ MIN

POWER CONTACT:

CONTACT RESISTANCE = $6m\Omega$ MAX

CURRENT RATING = M80-335 = 20A MAX WITH I2AWG M80-336 = 15A MAX WITH 14AWG M80-337 = 10A MAX WITH 16AWG

M80-338 = 8A MAX WITH 18AWG M80-339 = 5A MAX WITH 20AWG

M80-PM5 = 40A MAX WITH IOAWG CONTACT AS SPECIFIED

MECHANICAL:

DURABILITY = 500 OPERATIONS POWER CONTACT:

INSERTION FORCE:

M80-335/336/337/338/339 = 8N MAX

M80-PM5 = I5N MAX

WITHDRAWAL FORCE = 0.5N MIN

ENVIRONMENTAL:

TEMPERATURE RANGE


M80-335/336/337/338/339 = -55°C TO +125°C

 $M80-PM5 = -55^{\circ}C TO + 150^{\circ}C$

PACKING:

BAG

FOR COMPLETE SPECIFICATION SEE COMPONENT SPECIFICATION COO5XX (LATEST ISSUE)




POWER CABLE STRIPPING DIMENSIONS


DIMENSION	CALCULATION
DIM 'A'	4 x No. OF CONTACTS - 4.00
DIM 'B'	4 x No. OF CONTACTS + 5.00
DIM 'C'	4 x No. OF CONTACTS + 10.00


EXAMPLE 2: CONNECTOR WITH 10 POWER CONTACTS. M80-500000MP-I0-335-00-000

DIM 'A' = 36.00mm, DIM 'B' = 45.00mm, DIM 'C' = 50.00mm

POWER CRIMP & SOLDER CONTACTS ONLY

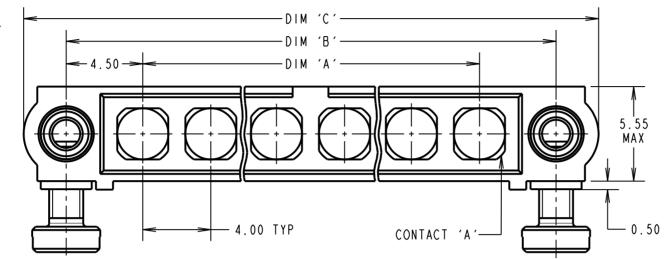

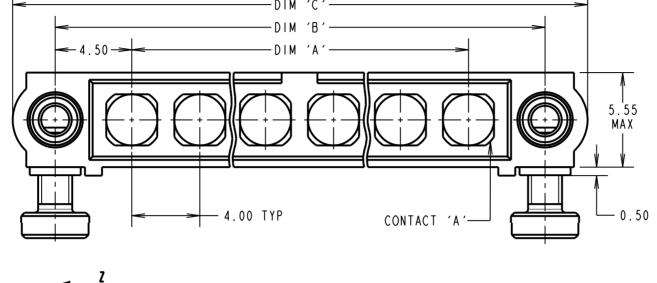

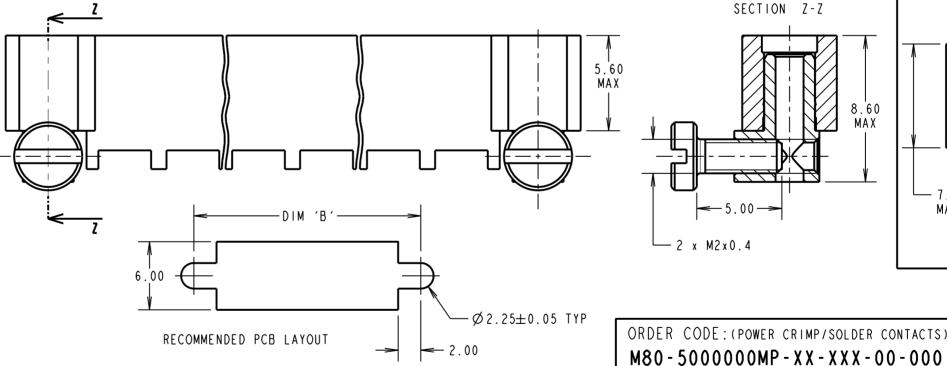

CRIMP/SOLDER NOTES:

- I. CONNECTORS ARE SUPPLIED WITH CONTACTS AND SCREWS LOOSE
- 2. FOR EXTRA POWER CONTACTS USE PART NUMBERS M80-335/336/337/338/339/
- COAX & POWER CONTACT EXTRACTION TOOL = Z80-290.
- 4. RECOMMENDED HAND CRIMP TOOL FOR CONTACTS 338/339 = Z80-290, AND POSITIONER Z80-295.
- INSTRUCTION SHEETS ARE AVAILABLE.
- 6. THIS ASSEMBLY CAN ONLY MATE WITH FP FEMALE FIXINGS.



THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT

ANGLES = ±5° OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION UNLESS STATED

TOLERANCES X. = ±1mm X.X = ±0.50mm $X.XX = \pm 0.10$ mm XXX = ±0.01mm

FINISH:

02 TO 12

SPECIAL CONTACTS -

337 = POWER CONTACT

S/AREA:

MATERIAL: SEE ABOVE SEE ABOVE

335 = POWER CONTACT 12AWG SOLDER M80-335 336 = POWER CONTACT 14AWG SOLDER M80-336

16AWG SOLDER M80-337

= POWER CONTACT 18AWG SOLDER/CRIMP M80-338 339 = POWER CONTACT 20AWG SOLDER/CRIMP M80-339
PM5 = POWER CONTACT 10AWG SOLDER M80-PM5

DATAMATE MIX-TEK

PC TAIL MALE ASSY WITH BOARD MOUNT J/SCREWS

DRAWING NUMBER:

- 7.85 MAX(14.0) -

7.85

MAX

M80-338/339

x No. OF CONTACTS

(14.0) -

M80-PM5

x No. OF CONTACTS

M80-335/336/337

x No. OF CONTACTS

(12.7)

SECTION Z-Z

7.85

MAX

 $-2 \times M2 \times 0.4$

TOTAL No. OF CONTACTS -

08.09.17 13269 NAMF DATE C/NOTI


APPROVED: F. MCGOWAN CHECKED: S. BENNETT

DRAWN: R.ADDE CUSTOMER REF.:

ASSEMBLY DRG:

M80-500000MP-XX-XXX-00-000 OF,

Customer Information Sheet DRAWING No - M80-5000000MP-XX-XXX-00-000 IF IN DOUBT - ASK NOT TO SCALE THIRD ANGLE PROJECTION

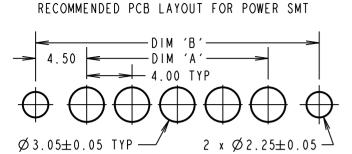

RECOMMENDED PCB LAYOUT FOR POWER CONTACTS: M80-331/332 DIM 'B

-DIM 'A' - 4.00 TYP -Ø∣.65±0.05 TYP $2 \times \emptyset 2.25 \pm 0.05$

RECOMMENDED PCB LAYOUT FOR POWER CONTACTS: M80-PM3/PM4 4.50 DIM 'A' - 4.00 TYP

 $2 \times \emptyset 2.25 \pm 0.05$

RECOMMENDED PCB LAYOUT FOR COAX CONTACTS: M80-313/314 -DIM 'B'--Ø2.25±0.05 1.00 \emptyset 0.65±0.05 TYP \longrightarrow 4.00 — 1.00 TYP

M80-313/M80-314

x No. OF CONTACTS

−7.60 MAX ->

ALL DIMENSIONS IN mm

M80-333/M80-334

x No. OF CONTACTS

-ØⅠ.50

DATE

F. MCGOWAN

S. BENNETT

R. ADDE

C/NOTI

— 7.60 MAX →

'E

DIM

SPECIFICATIONS:

MOULDING: GLASS FILLED PPS, UL94V-O, BLACK POWER CONTACT: COPPER ALLOY COAX CONTACT:

BODY = COPPER ALLOY INNER CONTACT = COPPER ALLOY INSULATOR = PTFE

BOARDMOUNT JACKSCREW, SCREW = STAINLESS STEEL

POWER CONTACT: GOLD COAX CONTACT: BODY, INNER CONTACT = GOLD

ELECTRICAL:

WORKING VOLTAGE = 800V AC/DC VOLTAGE PROOF = 1200V AC/DC

INSULATION RESISTANCE = $100M\Omega$ MIN POWER CONTACT:

CONTACT RESISTANCE = $6m\Omega$ MAX CURRENT RATING: M80-333/334/33A = 20A MAX

M80-PM3/PM4 = 40A MAX

COAX CONTACT: FREQUENCY RANGE = 6GHz

IMPEDANCE = 50Ω V.S.W.R = 1.05 + (0.04 x FREQUENCY) GHz MAX CONTACT RESISTANCE = $6m\Omega$ MAX

INSULATION RESISTANCE = 10 6 MΩ @250V AC OPERATING VOLTAGE = 180V AC @ 500mA MAXIMUM VOLTAGE = 1000V AC

MECHANICAL:

DURABILITY = 500 OPERATIONS POWER CONTACT:

INSERTION FORCE:

M80-333/334/33A = 8N MAX M80-PM3/PM4 = 15N MAX

WITHDRAWAL FORCE = 0.5N MIN

COAX CONTACT

INSERTION FORCE = 8N MAX

WITHDRAWAL FORCE = 0.5N MIN

ENVIRONMENTAL:


TEMPERATURE RANGE: M80-313/314/333/334/33A = -55°C TO +125°C M80-PM3/PM4 = -55°C TO +125°C


PACKING:

FOR COMPLETE SPECIFICATION SEE COMPONENT SPECIFICATION COOSXX (LATEST ISSUE)

HORIZONTAL PC TAIL & SMT CONTACTS ONLY


 \emptyset 2.15±0.05 TYP

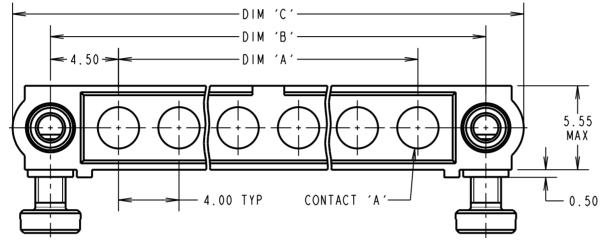

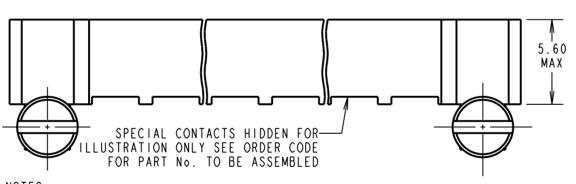


TOTAL No. OF CONTACTS -

02 TO 12

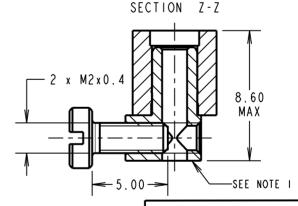

DIM

'D'



APPROVED:

CHECKED:

CUSTOMER REF.:

ASSEMBLY DRG:

M80-500000MP-XX-XXX-00-000 0F

M80-33A

PC TAIL NOTES:

I. THIS ASSEMBLY CAN ONLY MATE WITH FP

FEMALE FIXINGS.

2. CONNECTORS ARE SUPPLIED WITH SCREWS LOOSE.

DIMENSION	CALCULATION
DIM 'A'	4 x No. OF CONTACTS - 4.00
DIM 'B'	4 x No. OF CONTACTS + 5.00
DIM 'C'	4 x No. OF CONTACTS + 10.00
DIM 'D'	M80-313 = 3.0mm, M80-314 = 4.5mm
DIM 'E'	M80-333 = 3.5mm, M80-334 = 5.0mm
DIM 'F'	M80-PM3 = 3.5mm, M80-PM4 = 5.0mm

EXAMPLE 2: CONNECTOR WITH 10 POWER CONTACTS. M80-500000MP-10-333-00-000 DIM 'A' = 36.00mm, DIM 'B' = 45.00mm, DIM 'C' = 50.00mm DIM 'E' = 3.5mm

ORDER CODE: (PC TAIL CONTACTS ONLY)

M80-500000MP-XX-XXX-00-000

SPECIAL CONTACTS

SPECIAL CONTACTS

313 = COAX CONTACT 3.0mm PC TAIL M80-313

314 = COAX CONTACT 4.5mm PC TAIL M80-314

333 = 20A POWER CONTACT 3.5mm HORZ' PC TAIL M80-333

334 = 20A POWER CONTACT 5.0mm HORZ' PC TAIL M80-334

PM3 = 40A POWER CONTACT 5.0mm HORZ' PC TAIL M80-PM3

PM4 = 40A POWER CONTACT 5.0mm HORZ' PC TAIL M80-PM3

33A = POWER CONTACT HORZ' SMT M80-33A

www.harwin.com

technical@harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
COMFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES X. = ±1mm X.X = ±0.50m $X.XX = \pm 0.10$ mm X.XXX = ±0.01mm

UNLESS STATED

VIEW OF COAX CONTACT

BODY

INSULATOR

ANGLES = ±5°

S/AREA:

MATERIAL: SEE ABOVE FINISH:

DIM 'F'

DATAMATE MIX-TEK PC TAIL MALE ASSY WITH BOARD MOUNT J/SCREWS

-Ø2.00

x No. OF

CONTACTS

-7.60 MAX->

DRAWING NUMBER: SEE ABOVE