

## Features

- 2-way
- 90 Degree
- Surface Mount
- Tape and reel packaging available
- 260°C Reflow Compatible
- RoHS\* compliant

## Product Image



## Description

M/A-COM's MAPD-009850-HW1268 is a RoHS Compliant 2-way 90° power divider in a low cost, surface mount package. Ideally suited for high volume cellular, wireless applications.

The MAPD-009850-HW1268 is available in a SM-89 surface mount package and is designed to be utilized in both RoHS and standard reflow profiles. Parts are packaged in tape & reel.

## Ordering Information

Part Number	Package
MAPD-009850-HW1268	Tape and Reel (900 piece Reel)

## Electrical Specifications: $T_A = 25^\circ\text{C}$ , $Z_0 = 50\Omega$

Frequency Range	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	112 - 168 MHz	dB	—	0.5	1.2
Isolation	112 - 168 MHz	dB	18	23	—
Amplitude Unbalance	112 - 168 MHz	dB	—	1.0	2.0
Phase Unbalance	112 - 168 MHz	°	—	1°	2°
Input Return Loss	112 - 168 MHz	dB	20	24	—

## Absolute Maximum Ratings <sup>1,2</sup>

Parameter	Absolute Maximum
Impedance	50 Ohms nominal
RF Power	1 Watt
Internal Load Dissipation	0.125 Watt
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

## Pin Configuration


Pin No.	Function
Input	1
Port 1	4
Port 2	6
External 50 Ohms	3
Not Connected	2,5

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.


<sup>1</sup> \* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

## Typical Performance Curves


**Insertion Loss Port 1**

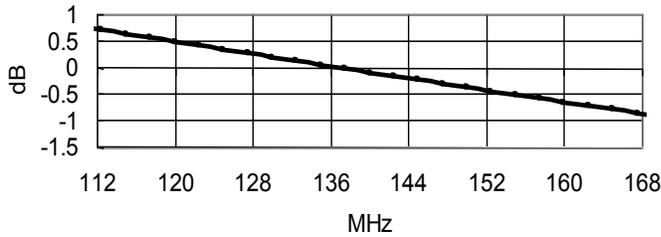


**Insertion Loss port 2**

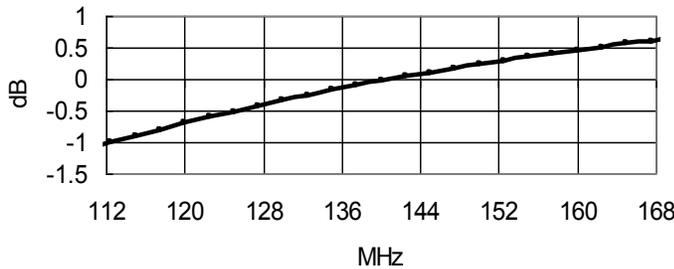


**Amplitude Unbalance**

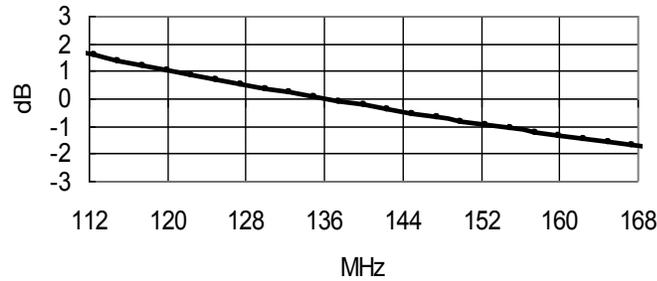

**Isolation**

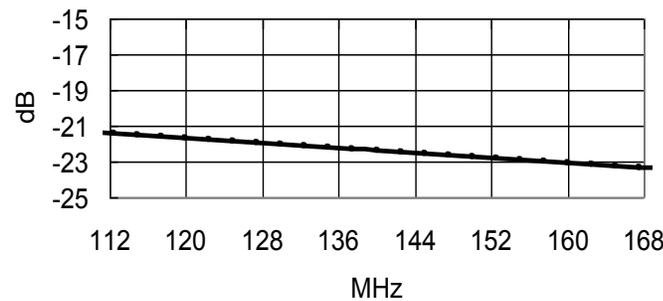


## SM - 89 Package

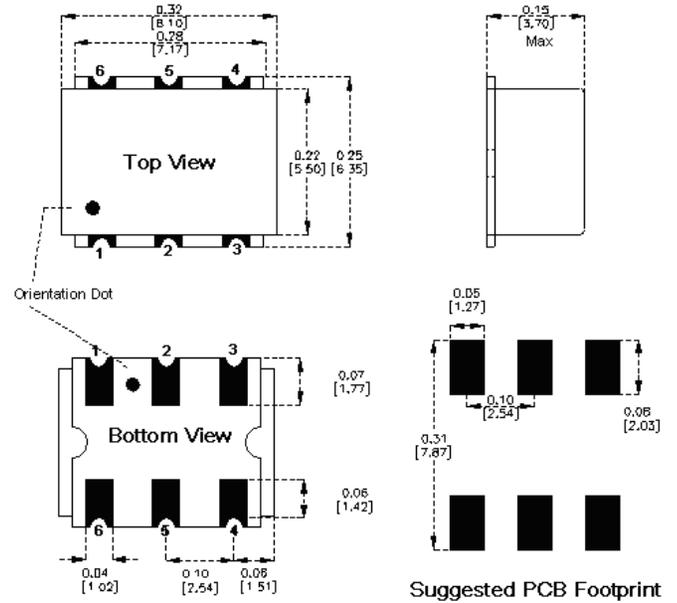


\* Dimensions are inches (millimeters) ± 0.015 (0.38) unless otherwise specified.

**Phase Unbalance**

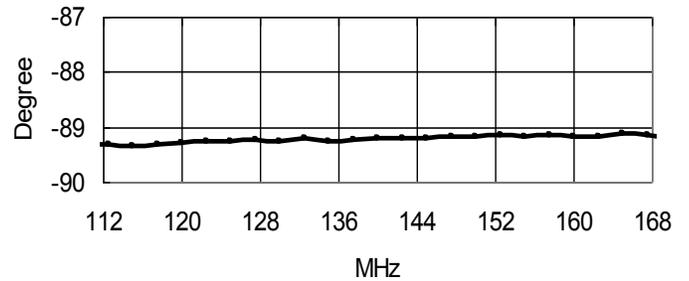

**Input Return Loss**

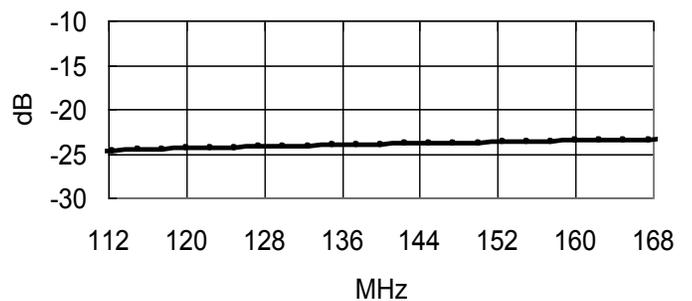

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.